

## 37534 KND-L9D-NW-B-P3

Recessed - Mounted LED Office Fixture

5905339375346



### GENERAL DATA:

**Colour:** black

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Minimum distance from the illuminated object :** 0,5m

**Compatible with a dimmer:** DALI

**The product is not suitable to be covered with a heat-insulating material:** yes

**Length [mm]:** 1195

**Width [mm]:** 295

**Height [mm]:** 39

**Integrated LED light source :** yes

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 26

**Class of protection against electric shock :** I

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux of the light fitting [lm]:** 3750

**Colour temperature:** white

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses :** 6

**Colour rendering index:** 80

**Service life [h]:** 50000

**Luminous-flux-retention factor at the end of rated service life :**  
L90B10

**Number of on/off cycles:**  $\geq 30000$

**Lighting angle [°]:** 90

**Luminous efficiency of the lamp [lm/W]:** 144

**Ambient temperature range to which the product can be exposed:** 5÷25

**Shade type:** soczewka

**Enclosure material:** Metal

**Connection type:** Self-clamping block

**Range of sections of wires used [mm²]:** 0,5÷2,5

**IP class:** 20

### LOGISTIC DATA:


**Unit of measurement:** unit

**Packaging method:** 1

**Number of units in the secondary packaging :** 1

## 37534 KND-L9D-NW-B-P3

Recessed - Mounted LED Office Fixture

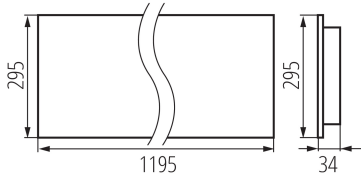

**Number of units in the packaging :** 1

**Net unit weight [g] :** 2700

**Grammage [g] :** 2780

**Gross unit weight [g] :** 2780

**Length of a unit pack [cm] :** 123

**Width of a unit pack [cm] :** 32.5

**Height of a unit pack [cm] :** 5.5

**Weight of a cardboard box [kg] :** 2.78

**Width of a cardboard box [cm] :** 32.5

**Height of a cardboard box [cm] :** 5.5

**Length of a cardboard box [cm] :** 123

**Volume of a cardboard box [m³] :** 0.021986

