

37554 KNDU-S6D-WW-B-P1D

Recessed - Mounted LED Office Fixture

5905339375544



KNDU-B-P1D



GENERAL DATA:

Colour: black

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object : 0,5m

Compatible with a dimmer: DALI

The product is not suitable to be covered with a heat-insulating material: yes

Length [mm]: 595

Width [mm]: 595

Height [mm]: 39

Integrated LED light source : yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 19

Class of protection against electric shock : I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 2600

Colour temperature: Warm white

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses : 6

Colour rendering index: 80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life :
L90B10

Number of on/off cycles: ≥ 30000

Lighting angle [°]: 60

Luminous efficiency of the lamp [lm/W]: 137

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: soczewka

Enclosure material: Metal

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 0,5÷2,5

IP class: 20

UGR: <16



LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

37554 KNDU-S6D-WW-B-P1D

Recessed - Mounted LED Office Fixture

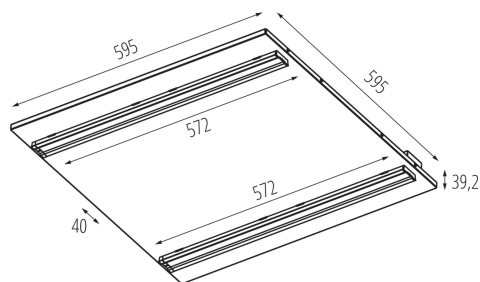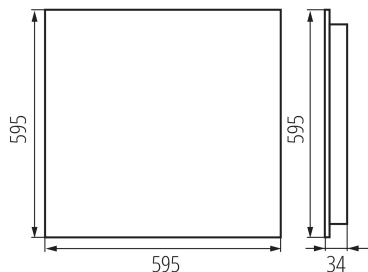

Number of units in the secondary packaging : 1

Number of units in the packaging : 1

Net unit weight [g] : 2580

Grammage [g] : 2640

Gross unit weight [g] : 2640

Length of a unit pack [cm] : 63

Width of a unit pack [cm] : 61

Height of a unit pack [cm] : 5.5

Weight of a cardboard box [kg] : 2.64

Width of a cardboard box [cm] : 61

Height of a cardboard box [cm] : 5.5

Length of a cardboard box [cm] : 63

Volume of a cardboard box [m³] : 0.021137