

## 37630 T8 LED 9-NW


LED light source

5905339376305

100  $\frac{\text{lm}}{\text{W}}$

GLASS tube

IC driver



### GENERAL DATA:

**Colour:** white

**Compatible with a dimmer:** no

**Power supply of T8 LED fluorescent lamps:** Unilateral

**Width [mm]:** 28

**Height [mm]:** 600

**Diameter [mm]:** 28

**Depth [mm]:** 28

**Mercury content:** no

**Mercury content in the lamp [mg]:** 0

**Replacement LED light switch:** not included

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Rated power [W]:** 9

**Lampshade material:** glass

**Light source:** T8 LED

**Diode type:** LED SMD

**Total rated luminous flux [lm]:** 900

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 900

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** in sphere (360°)

**Colour temperature:** white

**Correlated colour temperature [K]:** 4000

**Colour consistency in McAdam ellipses:** 6

**Colour rendering index:** 80

**Cap (Light source):** G13

**Rated lamp-service life [h]:** 20000

**Number of on/off cycles:**  $\geq 20000$

**Rated beam angle [°]:** 200

**Lamp rated current [mA]:** 67

**Annual power consumption [kWh/1000h]:** 9

**Luminous efficiency of the lamp [lm/W]:** 100

**Ambient temperature range to which the product can be exposed:** -10+40

**Kształt:** linear

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 25


**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 25

### LED light source



**Net unit weight [g] :** 84  
**Grammage [g] :** 110.8  
**Gross unit weight [g] :** 84  
**Length of a unit pack [cm] :** 60.5  
**Width of a unit pack [cm] :** 3  
**Height of a unit pack [cm] :** 3  
**Weight of a cardboard box [kg] :** 2.77  
**Width of a cardboard box [cm] :** 3  
**Height of a cardboard box [cm] :** 3  
**Length of a cardboard box [cm] :** 64.5  
**Volume of a cardboard box [m<sup>3</sup>] :** 0.000581

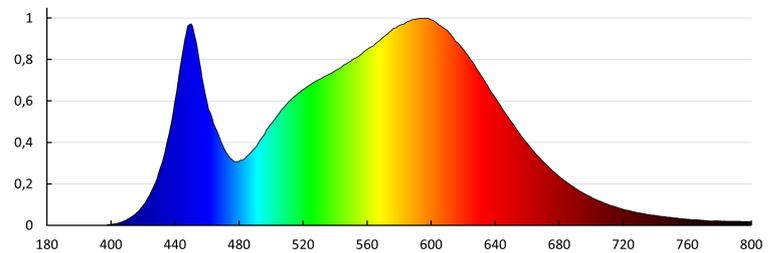

KANLUX S.A. (kat 37630) T8 LED 9-NW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 37630) T8 LED 9-NW  
Lampy: 1 x T8 LED 9-NW

