

37635 T8 LED 22-CW


LED light source

5905339376350

100 $\frac{\text{lm}}{\text{W}}$

GLASS tube

IC driver



GENERAL DATA:

Colour: white

Compatible with a dimmer: no

Power supply of T8 LED fluorescent lamps: Unilateral

Width [mm]: 28

Height [mm]: 1512

Diameter [mm]: 28

Depth [mm]: 28

Mercury content: no

Mercury content in the lamp [mg]: 0

Replacement LED light switch: not included

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Rated power [W]: 22

Lampshade material: glass

Light source: T8 LED

Diode type: LED SMD

Total rated luminous flux [lm]: 2270

Useful luminous flux of the light source Φ_{use} [lm]: 2270

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: cold white

Correlated colour temperature [K]: 6500

Colour consistency in McAdam ellipses: 6

Colour rendering index: 80

Cap (Light source): G13

Rated lamp-service life [h]: 20000

Number of on/off cycles: ≥ 20000

Rated beam angle [°]: 200

Lamp rated current [mA]: 167

Luminous efficiency of the lamp [lm/W]: 103

Ambient temperature range to which the product can be exposed: -10+40

Kształt: linear

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 25

Number of units in the secondary packaging: 1

Number of units in the packaging: 25

Net unit weight [g]: 210

LED light source



Grammage [g]: 272.8

Gross unit weight [g]: 236

Length of a unit pack [cm]: 151.5

Width of a unit pack [cm]: 3

Height of a unit pack [cm]: 3


Weight of a cardboard box [kg]: 6.82

Width of a cardboard box [cm]: 19.5

Height of a cardboard box [cm]: 19

Length of a cardboard box [cm]: 156

Volume of a cardboard box [m³]: 0.057798

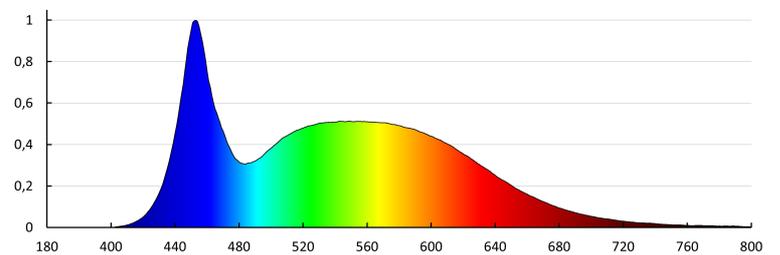

KANLUX S.A. (kat 37635) T8 LED 22-CW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 37635) T8 LED 22-CW
Lampy: 1 x T8 LED 22-CW

