

## 38261 FIZU IP44 4,8W NW-B

Downlight fitting

5905339382610



Kanlux FIZU LED downlight accent luminaires are modern built-in solutions. They are available in two versions: an integrated fixed luminaire with IP44/20 and an integrated adjustable luminaire with IP20. Both versions are available in black and white with a matte finish. The housing made of polyamide ensures the durability of the luminaires, and the internal aluminum radiator, which dissipates heat, translates into safety of use. The quick connector ensures trouble-free installation. The adjustable version with IP20 offers a 30° tilt angle and is available in two light colors: neutral and warm. The IP44/20 luminaire, available with a neutral light color, will work well in places with increased humidity such as laundries, drying rooms, and is also an ideal luminaire for the bathroom.

### GENERAL DATA:

**Colour:** black

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** no

**The product is not suitable to be covered with a heat-insulating material:** yes

**Height [mm]:** 32

**Diameter [mm]:** 80

**Assembly hole [mm]:** Ø65

**Mercury content in the lamp [mg]:** 0

**Integrated LED light source:** yes

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 4,8

**Class of protection against electric shock:** II

**Lampshade material:** plastic


**Enclosure material:** plastic

**Diode type:** LED SMD

**Useful luminous flux of the light source Φuse [lm]:** 420

**Useful luminous flux of the light source Φuse [lm]:** in narrow cone (90°)

**Colour temperature:** white



Date of issue: 31.03.2025, 14:45

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

## 38261 FIZU IP44 4,8W NW-B


Downlight fitting



**Correlated colour temperature [K]:** 4000  
**Colour consistency in McAdam ellipses :** 6  
**Colour rendering index:** 80  
**Service life [h]:** 25000  
**Number of on/off cycles:** ≥15000  
**Lighting angle [°]:** 36  
**Ambient temperature range to which the product can be exposed:** 5÷25  
**Connection type:** Terminal block  
**Range of sections of wires used [mm<sup>2</sup>]:** 0,5-1,5  
**IP class:** 44/20  
**Kształt:** round

### LOGISTIC DATA:

**Unit of measurement:** unit  
**Packaging method:** 80  
**Number of units in the secondary packaging :** 1  
**Number of units in the packaging:** 80  
**Net unit weight [g]:** 74  
**Grammage [g]:** 97.5  
**Gross unit weight [g]:** 92  
**Length of a unit pack [cm]:** 10  
**Width of a unit pack [cm]:** 3.5  
**Height of a unit pack [cm]:** 8  
**Weight of a cardboard box [kg]:** 7.8  
**Width of a cardboard box [cm]:** 29  
**Height of a cardboard box [cm]:** 18  
**Length of a cardboard box [cm] :** 51  
**Volume of a cardboard box [m<sup>3</sup>]:** 0.026622

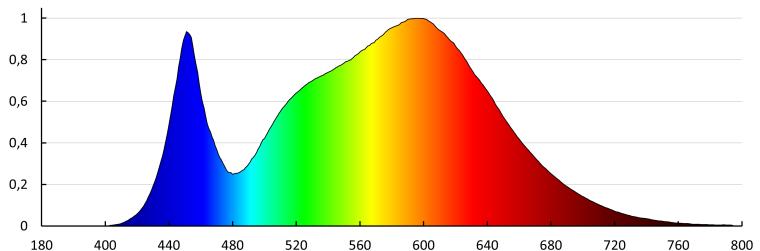


## 38261 FIZU IP44 4,8W NW-B

### Downlight fitting

KANLUX S.A. (kat 38261) FIZU IP44 4,8W NW-B / Krzywa rozszerzenia światła (biegunowo)

Oprawa: KANLUX S.A. (kat 38261) FIZU IP44 4,8W NW-B  
Lampy: 1 x FIZU 4,8W NW

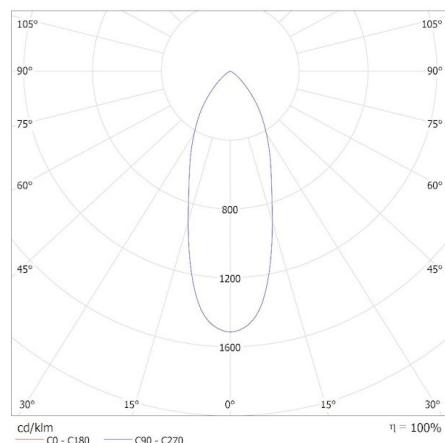

Date of issue: 31.03.2025, 14:45

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com