


38605 FLS LENS 90D

Accessory for floodlights

5905339386052

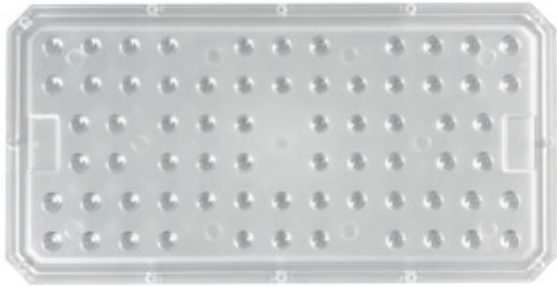

The Kanlux STADER modular floodlight allows you to connect from 1 to 4 modules, thus offering power from 200W (30,000 lm) to 800W (120,000 lm). The luminaire module consists of: housing, LED module, power supply, lens system and cables for connecting/connecting subsequent modules. The luminous efficacy of the floodlight is 150 lm/W, resistance to solids and water penetration IP66, and resistance to mechanical damage IK10. The adjustable handle allows you to precisely set the lighting angle of the luminaire. The housing is cast aluminum with a PC diffuser, and the available color temperature is 4000K. The length of the connecting cables (connection or connection to the next module) is ≥ 20 cm. Warranty: 5 years.

TECHNICAL DATA:

Material: plastic

Lighting angle [°]: 90

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 50

Number of units in the secondary packaging: 1

Number of units in the packaging: 50

Net unit weight [g]: 234

Grammage [g]: 259.6

Gross unit weight [g]: 242

Length of a unit pack [cm]: 44

Width of a unit pack [cm]: 43

Height of a unit pack [cm]: 39

Weight of a cardboard box [kg]: 12.98

Width of a cardboard box [cm]: 18

Height of a cardboard box [cm]: 2

Length of a cardboard box [cm]: 35.5

Volume of a cardboard box [m³]: 0.001278

