

38911 LCOB 14W/M 12IP00-CCT

LED tape

5905339389114



12V



GENERAL DATA:

Place of application: Indoors

Minimum distance from the illuminated object: 0,1m

Length [mm]: 5000

Width [mm]: 10

Depth [mm]: 2

Mercury content: no

Mercury content in the lamp [mg]: 0

TECHNICAL DATA:

Rated voltage [V]: 12 DC

Rated power [W]: 1m = 14

Class of protection against electric shock: III

Diode type: LED SMD

Luminous flux [lm]: 1m = max 1260 (WW+CW)

Useful luminous flux of the light source Φ_{use} [lm]: 0,5m = 280 (WW)

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: Warm white, cold white, white

Correlated colour temperature [K]: 2700-6500

Colour consistency in McAdam ellipses: 6

Colour rendering index: 90

Rated lamp-service life [h]: 30000

Number of on/off cycles: ≥ 30000

Ambient temperature range to which the product can be exposed: 5÷25

Connection type: Free cable ends

IP class: 00

Possibility of cutting LED strips into segments [cm]: 2,6

Energy efficiency class: G

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 25

Number of units in the secondary packaging: 25

Number of units in the packaging: 50


Net unit weight [g]: 84

Grammage [g]: 140.4

Gross unit weight [g]: 130

38911 LCOB 14W/M 12IP00-CCT

LED tape

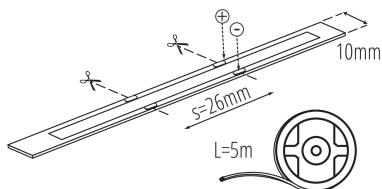

Length of a unit pack [cm] : 20.5

Width of a unit pack [cm] : 1.5

Height of a unit pack [cm] : 22.5

Weight of a cardboard box [kg] : 7.02

Width of a cardboard box [cm] : 30

Height of a cardboard box [cm] : 29

Length of a cardboard box [cm] : 46

Volume of a cardboard box [m³] : 0.04002

ADDITIONAL INFORMATION:

- 3 years Warranty under the terms of the warranty statement, available on our website
- Proper controller Kanlux CTRL and Kanlux REMOTE are required for correct operation.