

## 38912 LCOB 14W/M 12IP65-CCT

LED tape

5905339389121



12V



### GENERAL DATA:

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,1m

**Length [mm]:** 5000

**Width [mm]:** 10

**Depth [mm]:** 2

**Mercury content:** no

**Mercury content in the lamp [mg]:** 0

### TECHNICAL DATA:

**Rated voltage [V]:** 12 DC

**Rated power [W]:** 1m = 14

**Class of protection against electric shock:** III

**Diode type:** LED SMD

**Luminous flux [lm]:** 1m = max 1260 (WW+CW)

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 0,5m = 280 (WW)

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** in sphere (360°)

**Colour temperature:** Warm white, cold white, white

**Correlated colour temperature [K]:** 2700-6500

**Colour consistency in McAdam ellipses:** 6

**Colour rendering index:** 90

**Rated lamp-service life [h]:** 30000

**Number of on/off cycles:**  $\geq 30000$

**Ambient temperature range to which the product can be exposed:** 5÷25

**Connection type:** Free cable ends

**IP class:** 65

**Possibility of cutting LED strips into segments [cm]:** 2,6

**Energy efficiency class:** G

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 25

**Number of units in the secondary packaging:** 25

**Number of units in the packaging:** 50


**Net unit weight [g]:** 114

**Grammage [g]:** 170.4

**Gross unit weight [g]:** 160

## 38912 LCOB 14W/M 12IP65-CCT

LED tape

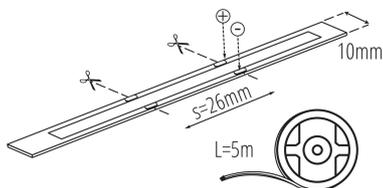

**Length of a unit pack [cm]** : 20.5

**Width of a unit pack [cm]** : 1.5

**Height of a unit pack [cm]** : 22.5

**Weight of a cardboard box [kg]** : 8.52

**Width of a cardboard box [cm]** : 30

**Height of a cardboard box [cm]** : 29

**Length of a cardboard box [cm]** : 46

**Volume of a cardboard box [m<sup>3</sup>]** : 0.04002

### ADDITIONAL INFORMATION:

- 3 years Warranty under the terms of the warranty statement, available on our website
- Proper controller Kanlux CTRL and Kanlux REMOTE are required for correct operation.