



38913 LCOB 19W/M24IP00-RGBW

LED tape

5905339389138



24V



GENERAL DATA:

Place of application: Indoors

Minimum distance from the illuminated object: 0,1m

Length [mm]: 5000

Width [mm]: 12

Depth [mm]: 2

Mercury content: no

Mercury content in the lamp [mg]: 0

TECHNICAL DATA:

Rated voltage [V]: 24 DC

Rated power [W]: 1m = 5,3 (NW)

Class of protection against electric shock: III

Diode type: LED SMD

Luminous flux [lm]: 1m = max 420 (NW)

Useful luminous flux of the light source Φ_{use} [lm]: 0,5m = 210 (NW)

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: RGBW, white

Correlated colour temperature [K]: RGB + 4000(W)

Colour consistency in McAdam ellipses: 6

Colour rendering index: 90

Cap (Light source): wires

Rated lamp-service life [h]: 30000

Number of on/off cycles: ≥ 30000

Ambient temperature range to which the product can be exposed: 5÷25

Connection type: Free cable ends

IP class: 00

Possibility of cutting LED strips into segments [cm]: 7,1

Energy efficiency class: G

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 25

Number of units in the secondary packaging: 25

Number of units in the packaging: 50

Net unit weight [g]: 96

Grammage [g]: 160.4

Date of issue: 01.07.2025, 15:47


We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

38913 LCOB 19W/M24IP00-RGBW

LED tape

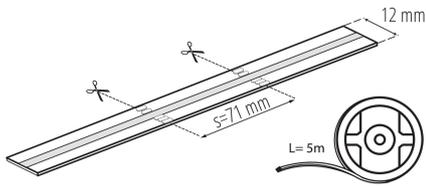

Gross unit weight [g] : 148
Length of a unit pack [cm] : 20.5
Width of a unit pack [cm] : 2
Height of a unit pack [cm] : 22.5
Weight of a cardboard box [kg] : 8.02
Width of a cardboard box [cm] : 30
Height of a cardboard box [cm] : 44
Length of a cardboard box [cm] : 46.5
Volume of a cardboard box [m³] : 0.06138

ADDITIONAL INFORMATION:

- 3 years Warranty under the terms of the warranty statement, available on our website
- Proper controller Kanlux CTRL and Kanlux REMOTE are required for correct operation.

