



## 38914 LCOB 19W/M24IP65-RGBW

LED tape

5905339389145



24V



### GENERAL DATA:

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,1m

**Length [mm]:** 5000

**Width [mm]:** 12

**Depth [mm]:** 2

**Mercury content:** no

**Mercury content in the lamp [mg]:** 0

### TECHNICAL DATA:

**Rated voltage [V]:** 24 DC

**Rated power [W]:** 1m = 5,3 (NW)

**Class of protection against electric shock:** III

**Diode type:** LED SMD

**Luminous flux [lm]:** 1m = max 420 (NW)

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** 0,5m = 210 (NW)

**Useful luminous flux of the light source  $\Phi_{use}$  [lm]:** in sphere (360°)

**Colour temperature:** RGBW, white

**Correlated colour temperature [K]:** RGB + 4000(W)

**Colour consistency in McAdam ellipses:** 6

**Colour rendering index:** 90

**Cap (Light source):** wires

**Rated lamp-service life [h]:** 30000

**Number of on/off cycles:**  $\geq 30000$

**Ambient temperature range to which the product can be exposed:** 5÷25

**Connection type:** Free cable ends

**IP class:** 65

**Possibility of cutting LED strips into segments [cm]:** 7,1

**Energy efficiency class:** G

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 25

**Number of units in the secondary packaging:** 25


**Number of units in the packaging:** 50

**Net unit weight [g]:** 134

**Grammage [g]:** 198.4

## 38914 LCOB 19W/M24IP65-RGBW

LED tape

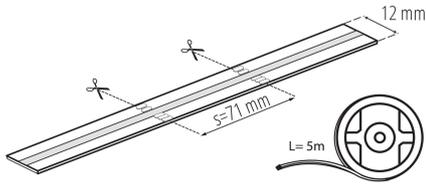

**Gross unit weight [g] :** 186

**Length of a unit pack [cm] :** 20.5

**Width of a unit pack [cm] :** 2

**Height of a unit pack [cm] :** 22.5

**Weight of a cardboard box [kg] :** 9.92

**Width of a cardboard box [cm] :** 30

**Height of a cardboard box [cm] :** 44

**Length of a cardboard box [cm] :** 46.5

**Volume of a cardboard box [m<sup>3</sup>] :** 0.06138

### ADDITIONAL INFORMATION:

- 3 years Warranty under the terms of the warranty statement, available on our website
- Proper controller Kanlux CTRL and Kanlux REMOTE are required for correct operation.