


38916 LCOB21W/M24IP65RGBCCT

LED tape

5905339389169



24V



GENERAL DATA:

Place of application: Indoors

Minimum distance from the illuminated object: 0,1m

Length [mm]: 5000

Width [mm]: 12

Depth [mm]: 2

Mercury content: no

Mercury content in the lamp [mg]: 0

TECHNICAL DATA:

Rated voltage [V]: 24 DC

Rated power [W]: 1m = max 11

Class of protection against electric shock: III

Diode type: LED SMD

Luminous flux [lm]: 1m = max 680 (WW+CW)

Useful luminous flux of the light source Φ_{use} [lm]: 0,5m = 170 (WW)

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: RGBW, Warm white, white, cold white

Correlated colour temperature [K]: RGB + 3000-6100K

Colour consistency in McAdam ellipses: 6

Colour rendering index: 90

Rated lamp-service life [h]: 30000

Number of on/off cycles: ≥ 30000

Ambient temperature range to which the product can be exposed: 5÷25

Connection type: Free cable ends

IP class: 65

Possibility of cutting LED strips into segments [cm]: 3,6

Energy efficiency class: G

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 25

Number of units in the secondary packaging: 25

Number of units in the packaging: 50


Net unit weight [g]: 138

Grammage [g]: 202.4

Gross unit weight [g]: 190

38916 LCOB21W/M24IP65RGB CCT

LED tape

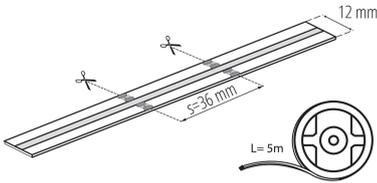

Length of a unit pack [cm]: 20.5

Width of a unit pack [cm]: 5

Height of a unit pack [cm]: 22.5

Weight of a cardboard box [kg]: 10.12

Width of a cardboard box [cm]: 30

Height of a cardboard box [cm]: 44

Length of a cardboard box [cm]: 46.5

Volume of a cardboard box [m³]: 0.06138

ADDITIONAL INFORMATION:

- 3 years Warranty under the terms of the warranty statement, available on our website