

38963 LAURIN EL-30 B-G

Wall & ceiling lighting fitting

5905339389633



LAURIN EL-30 B-G



Kanlux LAURIN spotlights provide a very large selection of directional ceiling and wall lamps. The simple and minimalist design can be successfully used in many rooms in the house. Free adjustment of the luminous flux direction is an additional advantage of these fixtures.

GENERAL DATA:

Colour: black/gold
Place of assembly: wall mounted, ceiling mounted
Place of application: Indoors
Minimum distance from the illuminated object : 0,5m
Height [mm]: 108
Diameter [mm]: 220

TECHNICAL DATA:


Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 3 x max 10
Class of protection against electric shock : I
Lampshade material: aluminum alloy
Enclosure material: aluminum alloy
Light source: PAR16
Light source included: no
Cap (Light source): GU10
Ambient temperature range to which the product can be exposed: 5÷25
Connection type: Bolt terminal block
Range of sections of wires used [mm²]: 1÷2,5
The fixture is movable horizontally [°]: 310
The fixture is movable vertically [°]: 90
Lighting-fixture angle regulation [°]: in two axes
IP class: 20
Kształt: round

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 8
Number of units in the secondary packaging : 1
Number of units in the packaging: 8

38963 LAURIN EL-30 B-G

Wall & ceiling lighting fitting

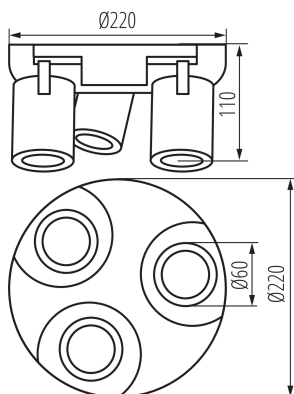

Net unit weight [g] : 900
Grammage [g] : 1095.63
Gross unit weight [g] : 1068
Length of a unit pack [cm] : 22.5
Width of a unit pack [cm] : 22.5
Height of a unit pack [cm] : 11.5
Weight of a cardboard box [kg] : 8.76504
Width of a cardboard box [cm] : 25
Height of a cardboard box [cm] : 46
Length of a cardboard box [cm] : 46
Volume of a cardboard box [m³] : 0.0529

