


39131 EXIN LED PIR L GR-WW

Staircase LED light fitting

5905339391315

IP
65



GENERAL DATA:

To be built into the wall : yes

Colour: grey

Place of assembly: Recessed mount in the wall

Place of application: Indoors and outdoors

Minimum distance from the illuminated object : 0,1m

Compatible with a dimmer : no

Wykrywanie ruchu: yes

Length [mm]: 80

Width [mm]: 80

Height [mm]: 48

Required diameter of the assembly box [Ømm]: 60

Assembly-hole dimensions [mm]: 60

Integrated LED light source : yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 2.5

Class of protection against electric shock : I

Lampshade material: plastic

Enclosure material: aluminum alloy

Diode type: LED SMD

Luminous flux [lm]: 50

Colour temperature: Warm white

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses : ≤6

Colour rendering index: 80

Service life [h]: 30000

Number of on/off cycles : ≥25000

Luminous efficiency of the lamp [lm/W]: 20

Ambient temperature range to which the product can be exposed : -15÷35

Sensor type: PIR

Connection type: Free cable ends

Wire length [m]: 0.1


Sensor-operation time [second-minute]: 30--

Sensor working angle [°]: H120

Illumination-level setpoint by which the sensor detects movement [lx]: <50

39131 EXIN LED PIR L GR-WW

Staircase LED light fitting

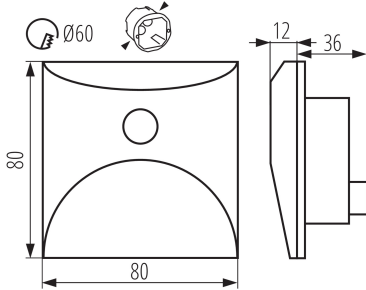

IP class: 65

Sensor range[m]: max 2

Kształt: square

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 100

Number of units in the secondary packaging: 1

Number of units in the packaging: 100

Net unit weight [g]: 134

Grammage [g]: 177.5

Gross unit weight [g]: 168

Length of a unit pack [cm]: 8.5

Width of a unit pack [cm]: 8.5

Height of a unit pack [cm]: 8.5

Weight of a cardboard box [kg]: 17.75

Width of a cardboard box [cm]: 36

Height of a cardboard box [cm]: 46

Length of a cardboard box [cm]: 44

Volume of a cardboard box [m³]: 0.072864