

39234 BLINGO AIO RM38W 60

Recessed-mounted LED panel

5905339392343



GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object : 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Feeder included: yes

Length [mm]: 595

Width [mm]: 595

Height [mm]: 28

Mercury content in the lamp [mg] : 0

Integrated LED light source: yes

Number of modules (LED light source): 6

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Power factor: 0.98

Maximum power [W]: max 38

Class of protection against electric shock : II

Lampshade material: PS

Enclosure material: iron

Panel/frame material: iron

Diode type: LED SMD

Luminous flux of the light fitting [lm]: max 4490

Useful luminous flux of the light source Φ_{use} [lm] : 820

Useful luminous flux of the light source Φ_{use} [lm] : in sphere (360°)

Colour temperature: white, Warm white, cold white

Correlated colour temperature [K] : 3000/4000/6500

Colour consistency in McAdam ellipses : 6

Colour rendering index: 90

Service life [h] : 50000

Number of on/off cycles : ≥ 50000

Lighting angle [°]: 115

Luminous efficiency of the lamp [lm/W] : max 118


Ambient temperature range to which the product can be exposed: 5÷25

Connection type: Self-clamping block

IP class: 20

39234 BLINGO AIO RM38W 60

Recessed-mounted LED panel

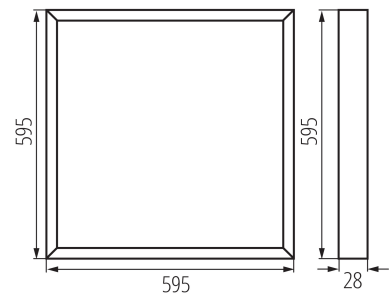

Kształt: square

LOGISTIC DATA:

- Unit of measurement: unit
- Packaging method: 5
- Number of units in the secondary packaging : 1
- Number of units in the packaging : 5
- Net unit weight [g] : 1358
- Grammage [g] : 1824
- Gross unit weight [g] : 1676
- Length of a unit pack [cm] : 60.5
- Width of a unit pack [cm] : 3
- Height of a unit pack [cm] : 64
- Weight of a cardboard box [kg] : 9.12
- Width of a cardboard box [cm] : 18
- Height of a cardboard box [cm] : 65.5
- Length of a cardboard box [cm] : 62
- Volume of a cardboard box [m³] : 0.073098

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

BLINGO AIO

| P(W) | CCT(K) | Φ(lm) |
|------|--------|-------|
| 30 | 3000 | 3320 |
| 29 | 4000 | 3570 |
| 30 | 6500 | 3510 |
| 34 | 3000 | 3750 |
| 33 | 4000 | 4060 |
| 34 | 6500 | 3970 |
| 38 | 3000 | 4120 |
| 37 | 4000 | 4490 |
| 38 | 6500 | 4360 |

BLINGO UAIO

| P(W) | CCT(K) | Φ(lm) |
|------|--------|-------|
| 30 | 3000 | 2990 |
| 29 | 4000 | 3220 |
| 30 | 6500 | 3160 |
| 34 | 3000 | 3370 |
| 33 | 4000 | 3650 |
| 34 | 6500 | 3560 |
| 38 | 3000 | 3710 |
| 37 | 4000 | 4040 |
| 38 | 6500 | 3910 |