

39235 BLINGO UAIO RM38W 60

Recessed-mounted LED panel

5905339392350



GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object : 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Feeder included: yes

Length [mm]: 595

Width [mm]: 595

Height [mm]: 28

Mercury content in the lamp [mg] : 0

Integrated LED light source: yes

Number of modules (LED light source): 6

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Power factor: 0.98

Maximum power [W]: max 38

Class of protection against electric shock : II

Lampshade material: PS

Enclosure material: iron

Panel/frame material: iron

Diode type: LED SMD

Luminous flux of the light fitting [lm]: max 4040

Useful luminous flux of the light source Φ_{use} [lm] : 740

Useful luminous flux of the light source Φ_{use} [lm] : in sphere (360°)

Colour temperature: white, Warm white, cold white

Correlated colour temperature [K] : 3000/4000/6500

Colour consistency in McAdam ellipses : 6

Colour rendering index: 90

Service life [h] : 50000

Number of on/off cycles : ≥ 50000

Lighting angle [°]: 90

Luminous efficiency of the lamp [lm/W] : max 106


Ambient temperature range to which the product can be exposed: 5÷25

Connection type: Self-clamping block

IP class: 20

39235 BLINGO UAIO RM38W 60

Recessed-mounted LED panel

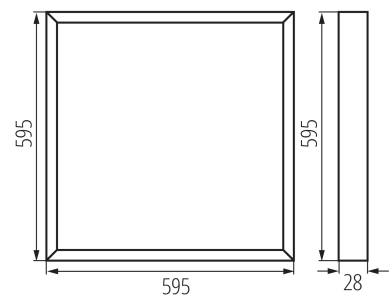

Kształt: square

UGR: <19

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 5

Number of units in the secondary packaging : 1

Number of units in the packaging : 5

Net unit weight [g] : 1546

Grammage [g] : 2018

Gross unit weight [g] : 1864

Length of a unit pack [cm] : 60.5

Width of a unit pack [cm] : 3

Height of a unit pack [cm] : 64

Weight of a cardboard box [kg] : 10.09

Width of a cardboard box [cm] : 18

Height of a cardboard box [cm] : 65.5

Length of a cardboard box [cm] : 62

Volume of a cardboard box [m³] : 0.073098

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

BLINGO AIO

P(W)	CCT(K)	Φ(lm)
30	3000	3320
29	4000	3570
30	6500	3510
34	3000	3750
33	4000	4060
34	6500	3970
38	3000	4120
37	4000	4490
38	6500	4360

BLINGO UAIO

P(W)	CCT(K)	Φ(lm)
30	3000	2990
29	4000	3220
30	6500	3160
34	3000	3370
33	4000	3650
34	6500	3560
38	3000	3710
37	4000	4040
38	6500	3910