

39237 BLINGO UAIO RM38W 120

Recessed-mounted LED panel

5905339392374



GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object : 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Feeder included: yes

Length [mm]: 1195

Width [mm]: 295

Height [mm]: 30

Mercury content in the lamp [mg] : 0

Integrated LED light source: yes

Number of modules (LED light source): 3

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: max 38

Class of protection against electric shock : II

Lampshade material: PS

Enclosure material: iron

Panel/frame material: iron

Diode type: LED SMD

Luminous flux of the light fitting [lm]: max 4040

Useful luminous flux of the light source Φ_{use} [lm] : 1480

Useful luminous flux of the light source Φ_{use} [lm] : in sphere (360°)

Colour temperature: Warm white, white, cold white

Correlated colour temperature [K] : 3000/4000/6500

Colour consistency in McAdam ellipses : 6

Colour rendering index: 90

Service life [h]: 50000

Number of on/off cycles: ≥ 50000

Lighting angle [°]: 90

Luminous efficiency of the lamp [lm/W]: max 106

Ambient temperature range to which the product can be exposed: 5÷25


Connection type: Self-clamping block

IP class: 20

UGR: <19

39237 BLINGO UAIO RM38W 120

Recessed-mounted LED panel

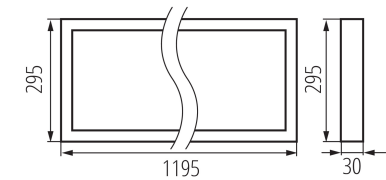

BLINGO AIO

| P(W) | CCT(K) | Φ(lm) |
|------|--------|-------|
| 30 | 3000 | 3320 |
| 29 | 4000 | 3570 |
| 30 | 6500 | 3510 |
| 34 | 3000 | 3750 |
| 33 | 4000 | 4060 |
| 34 | 6500 | 3970 |
| 38 | 3000 | 4120 |
| 37 | 4000 | 4490 |
| 38 | 6500 | 4360 |

BLINGO UAIO

| P(W) | CCT(K) | Φ(lm) |
|------|--------|-------|
| 30 | 3000 | 2990 |
| 29 | 4000 | 3220 |
| 30 | 6500 | 3160 |
| 34 | 3000 | 3370 |
| 33 | 4000 | 3650 |
| 34 | 6500 | 3560 |
| 38 | 3000 | 3710 |
| 37 | 4000 | 4040 |
| 38 | 6500 | 3910 |

LOGISTIC DATA:

- Unit of measurement: unit
Packaging method: 5
Number of units in the secondary packaging : 1
Number of units in the packaging : 5
Net unit weight [g] : 1608
Grammage [g] : 2180
Gross unit weight [g] : 1988
Length of a unit pack [cm] : 124.5
Width of a unit pack [cm] : 3.5
Height of a unit pack [cm] : 30.5
Weight of a cardboard box [kg] : 10.9
Width of a cardboard box [cm] : 20
Height of a cardboard box [cm] : 32
Length of a cardboard box [cm] : 126
Volume of a cardboard box [m³] : 0.08064

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website