



EAN: 5905339392602

Downlight fitting
Kanlux 39260 FIZU CCT B

CCT
CCT



Date of issue: 11.02.2026, 09:25

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

PRODUCT PARAMETERS

Rated voltage [V]	220-240 AC
Rated frequency [Hz]	50
Maximum power [W]	4
Luminous flux [lm]	370
Luminous efficiency of the lamp [lm/W]	93
Lighting angle [°]	40
Diode type	LED SMD
Integrated LED light source	yes
Correlated colour temperature [K]	3000/4000/6500
Colour consistency in McAdam ellipses	6
Colour temperature	white, warm white, cold white
Colour rendering index	80
Service life [h]	25000
Number of on/off cycles	≥15000
Place of application	Indoors
IP class	20
Compatible with a dimmer	no
The product is not suitable to be covered with a heat-insulating material	yes
Lighting-fixture angle regulation	in one axis
Lighting-fixture angle regulation [°]	30
Product category according to 2019/2020/EU	Light source (LS)
Mercury content in the lamp [mg]	0

DIMENSIONS AND MOUNTING

Height [mm]	32
Diameter [mm]	80
Place of assembly	mount in the ceiling
Assembly hole [mm]	Ø65
Connection type	Terminal block
Range of sections of wires used [mm ²]	0,5-1,5

MATERIAL AND CONSTRUCTION

Colour	black
Enclosure material	plastic
Lampshade material	plastic
Class of protection against electric shock	II
Minimum distance from the illuminated object	0,5m
Ambient temperature range to which the product can be exposed	5÷25

LIGHT SOURCE PARAMETERS

On-mode power of the light source Pon [W]	4
Energy consumption in on-mode of the light source (kWh/1000h)	4
Energy efficiency class	F
Useful luminous flux of the light source	370
Φuse [lm]	
Useful luminous flux of the light source	in narrow cone (90°)
Φuse [lm]	
Standby power (Psb)	0
Height of the light source [mm]	32
Width of the light source [mm]	80
Depth of the light source [mm]	80
Chromaticity coordinates (x)	0,44

LOGISTICS

Unit of measurement	unit
Packaging method	60
Number of units in the secondary packaging	1
Number of units in the packaging	60
Net unit weight [g]	92
Grammage [g]	124.33
Gross unit weight [g]	116
Length of a unit pack [cm]	9
Width of a unit pack [cm]	5
Height of a unit pack [cm]	9
Weight of a cardboard box [kg]	7.4598
Width of a cardboard box [cm]	28
Height of a cardboard box [cm]	20
Length of a cardboard box [cm]	50

Date of issue: 11.02.2026, 09:25

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.



Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

EN

LIGHT SOURCE PARAMETERS	
Chromaticity coordinates (y)	0,403
R9 colour rendering index value	0
Survival factor	0,9
The lumen maintenance factor	0,96
Peak luminous intensity [cd]	690
Beam angle [°]	40
Displacement factor ($\cos \varphi$)	0,5
LED light source replaces a fluorescent light source without integrated ballast of a particular wattage	Not applicable
Flicker metric (Pst LM)	1,0
Stroboscopic effect metric (SVM)	0,4
Colour-tunable light source	no
High luminance light source	no
Anti-glare shield	no
Dimmable	no


LOGISTICS	
Volume of a cardboard box [m ³]	0.028

PHOTOMETRIC DATA

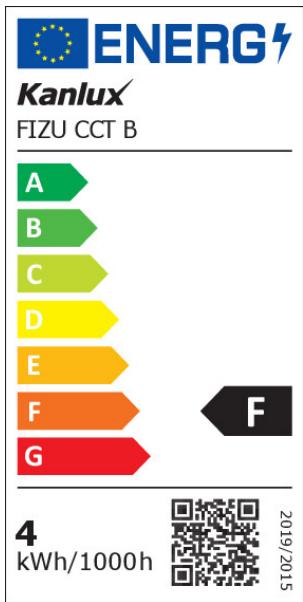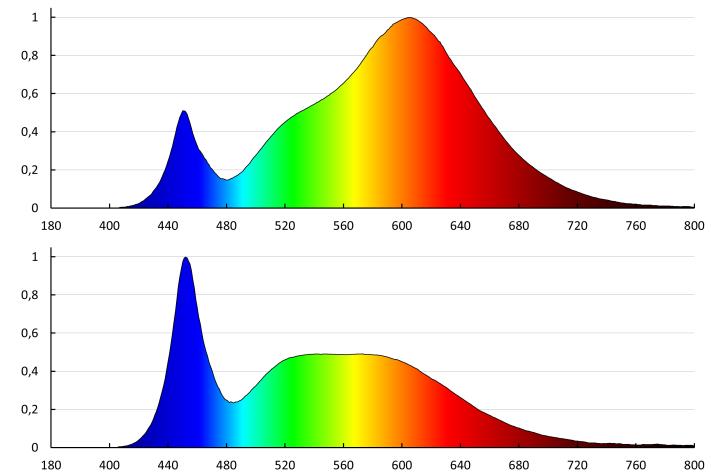

KANLUX S.A. (kat 39260) FIZU CCT B / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 39260) FIZU CCT B
Lampy: 1 x FIZU CCT 3000K

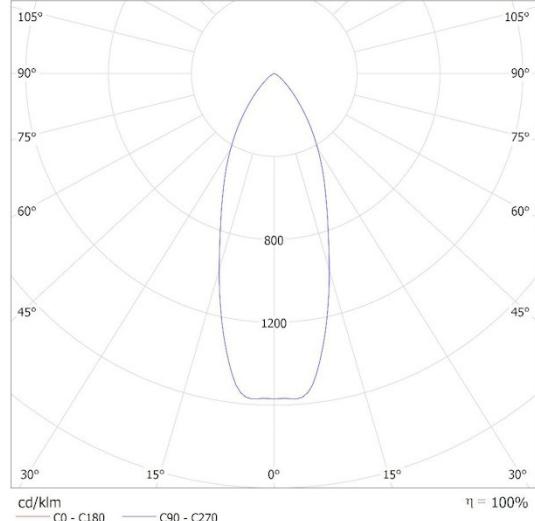

Date of issue: 11.02.2026, 09:25

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

EN