

39441 LCOBH14,4W/M24IP65-NW

LED tape

5905339394415



up to

146 $\frac{\text{lm}}{\text{W}}$



24V



GENERAL DATA:

Place of application: Indoors

Minimum distance from the illuminated object: 0,1m

Length [mm]: 5000

Width [mm]: 10

Height [mm]: 5000

Depth [mm]: 2

Mercury content: no

Mercury content in the lamp [mg]: 0

TECHNICAL DATA:

Rated voltage [V]: 24 DC

Rated power [W]: 1m = max 14,4

Class of protection against electric shock: III

Diode type: LED COB

Luminous flux [lm]: 1m = 2020

Useful luminous flux of the light source Φ_{use} [lm]: 0,5m = 1010

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: white

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: 6

Colour rendering index: 90

Cap (Light source): wires

Rated lamp-service life [h]: 30000

Number of on/off cycles: ≥ 30000

Ambient temperature range to which the product can be exposed: 5÷25

Connection type: Free cable ends

IP class: 65

Possibility of cutting LED strips into segments [cm]: 4,55

Energy efficiency class: E

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 25

Number of units in the secondary packaging: 25

Number of units in the packaging: 50

Net unit weight [g]: 126

Grammage [g]: 191.4

39441 LCOBH14,4W/M24IP65-NW

LED tape



Gross unit weight [g] : 172

Length of a unit pack [cm] : 21

Width of a unit pack [cm] : 1.5

Height of a unit pack [cm] : 23

Weight of a cardboard box [kg] : 9.57

Width of a cardboard box [cm] : 30.5


Height of a cardboard box [cm] : 30

Length of a cardboard box [cm] : 47

Volume of a cardboard box [m³] : 0.043005

ADDITIONAL INFORMATION:

- 3 years Warranty under the terms of the warranty statement, available on our website

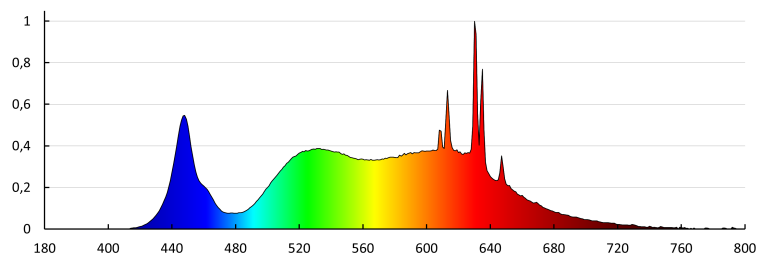

39441 LCOBH14,4W/M24IP65-NW

LED tape

ACCESSORIES

39530 CON P 10 LED band connector, CON P 10 (39530)



39531 CON P 10 CP LED band connector, CON P 10 CP (39531)



39532 CON P 10 CPC LED band connector, CON P 10 CPC (39532)



39533 CON P 10 L LED band connector, CON P 10 L (39533)

