


39466 AR-ML-WW-MAT-GW-NT

Linear LED luminaire

5905339394668



AR-M-MAT-GW-NT

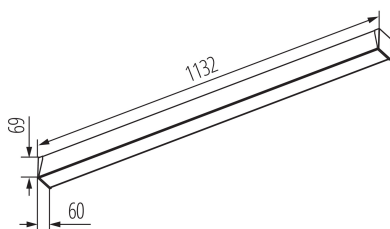

GENERAL DATA:

Colour: złote drewno
Place of assembly: ceiling mounted
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
Fixture lighting direction: down
Length [mm]: 1140
Width [mm]: 60
Height [mm]: 69
Integrated LED light source: yes
Number of modules (LED light source): 2

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 23
Class of protection against electric shock: I
Lampshade material: plastic
Enclosure material: stal|tworzywo sztuczne
Diode type: LED SMD
Luminous flux [lm]: 4270
Useful luminous flux of the light source Φ_{use} [lm]: 2135
Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)
Colour temperature: warm white
Correlated colour temperature [K]: 3000
Colour consistency in McAdam ellipses: ≤ 6
Colour rendering index: 80
Service life [h]: 50000
Luminous-flux-retention factor at the end of rated service life: L90B10
Number of on/off cycles: ≥ 30000
Lighting angle [°]: X85/Y95
Luminous efficiency of the lamp [lm/W]: 186
Ambient temperature range to which the product can be exposed: 5÷25
Shade type: matt
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 1,5÷2,5

39466 AR-ML-WW-MAT-GW-NT

Linear LED luminaire

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 1
Number of units in the secondary packaging : 1
Number of units in the packaging : 1
Net unit weight [g] : 2100

ACCESSORIES

32541 ALIN CORD 1F-B Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm



32535 ALIN CORD SQ 1F-B



07871 ROPE-NT 150 SINGLE ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

