


39484 AR-ML-WW-5D-BRW-NT

Linear LED luminaire

5905339394842

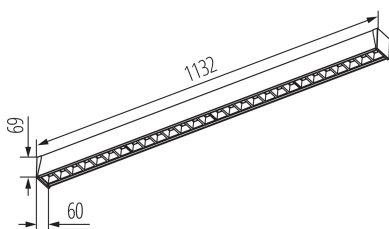

GENERAL DATA:

Colour: brązowe drewno
Place of assembly: ceiling mounted
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
Fixture lighting direction: down
Length [mm]: 1140
Width [mm]: 60
Height [mm]: 69
Integrated LED light source: yes
Number of modules (LED light source): 4

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 24
Class of protection against electric shock: I
Lampshade material: plastic
Enclosure material: stal|tworzywo sztuczne
Diode type: LED SMD
Luminous flux [lm]: 4060
Useful luminous flux of the light source Φ_{use} [lm]: 1015
Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)
Colour temperature: warm white
Correlated colour temperature [K]: 3000
Colour consistency in McAdam ellipses: ≤ 6
Colour rendering index: 80
Service life [h]: 50000
Luminous-flux-retention factor at the end of rated service life: L90B10
Number of on/off cycles: ≥ 30000
Lighting angle [°]: X60/Y60
Luminous efficiency of the lamp [lm/W]: 169
Ambient temperature range to which the product can be exposed: 5÷25
Shade type: louvre
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 1,5÷2,5

Date of issue: 27.11.2025, 09:20

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

Linear LED luminaire

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2100

ACCESSORIES

32541

ALIN CORD 1F-B

Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm



32535

ALIN CORD SQ 1F-B



07871

ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

