


39496 AR-ML-WW-S5D-BRW-NT

Linear LED luminaire

5905339394965



AR-M-S5D-BRW-NT

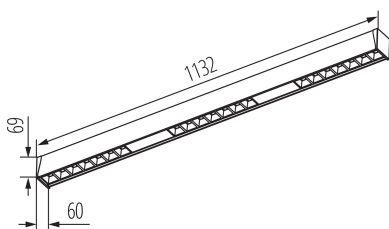

GENERAL DATA:

Colour: brązowe drewno

Place of assembly: ceiling mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Fixture lighting direction: down

Length [mm]: 1140

Width [mm]: 60

Height [mm]: 69

Integrated LED light source: yes

Number of modules (LED light source): 3

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 24

Class of protection against electric shock: I

Lampshade material: plastic

Enclosure material: stal|tworzywo sztuczne

Diode type: LED SMD

Luminous flux [lm]: 4150

Useful luminous flux of the light source Φ_{use} [lm]: 1385

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: warm white

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses: ≤ 6

Colour rendering index: 80

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L90B10

Number of on/off cycles: ≥ 30000

Lighting angle [°]: X60/Y60

Luminous efficiency of the lamp [lm/W]: 173

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: raster sekcje

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5÷2,5

39496 AR-ML-WW-S5D-BRW-NT

Linear LED luminaire

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 1
Number of units in the secondary packaging : 1
Number of units in the packaging : 1
Net unit weight [g] : 2100

ACCESSORIES

32541 ALIN CORD 1F-B Power supply terminal for ALIN luminaires and tracks, 1-phase, black, 150 cm



32535 ALIN CORD SQ 1F-B



07871 ROPE-NT 150 SINGLE ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

