


Ceiling-mounted light fitting with replaceable light source

5905339070258

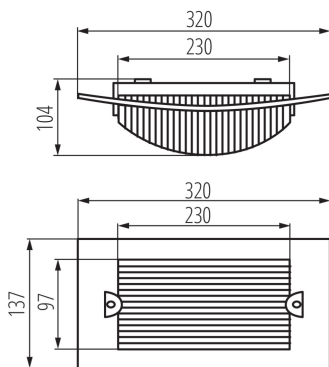

Kanlux TURK is a fixture with high resistance to UV radiation makes it perfect for outdoor use, e.g. on building façade, terrace or balcony.

GENERAL DATA:

Colour: white

Place of assembly: wall mounted, ceiling mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Length [mm]: 320

Width [mm]: 104

Height [mm]: 137

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: max 60

Class of protection against electric shock: II

Lampshade material: PC

Light source: GLS/CFL/LED

Light source included: no

Cap: E27

Enclosure material: PC

Connection type: Terminal block

Range of sections of wires used [mm²]: 1-2,5

IP class: 54

LOGISTIC DATA:

Packaging method: 20

Number of units in the packaging: 20

Net unit weight [g]: 350

Grammage [g]: 525

Length of a unit pack [cm]: 15

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 32.5

Weight of a cardboard box [kg]: 10.5

Width of a cardboard box [cm]: 57.5

Height of a cardboard box [cm]: 34

Length of a cardboard box [cm]: 60

Volume of a cardboard box [m³]: 0.1173

Ceiling-mounted light fitting with replaceable light source

ADDITIONAL INFORMATION:

- high UV resistance (PICTO)

KANLUX S.A. (kat 7025) TURK DL-60 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 7025) TURK DL-60
Lampy: 1 x A60 60W/c

