


70910 CYKLON EOL100

Ducted fan

8594056490011



CYKLON EOL100

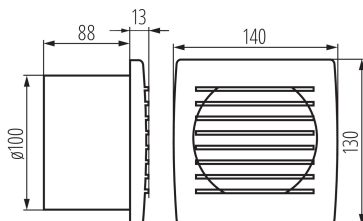

Kanlux CYKLON EOL series of fans is available in three sizes with diameter of 100, 120 and 150mm. They are made of plastic, in white colour. Their power is 19, 20 and 22W respectively. The number of rotations from each size comes to 2550/min.

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the wall

Place of application: Indoors

Off switch: yes

Length [mm]: 140

Width [mm]: 101

Height [mm]: 130

Assembly hole [mm]: Ø100

Cable length [m]: 1.9

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 19

Class of protection against electric shock: II

Engine rotation: 2550

Bearing type: sliding

Connection type: Cable terminated with a plug

Wire length [m]: 1.9

Sound pressure [dB]: 38

Air Flow [m³/h]: 100

Motor-power consumption [W]: 19

IP class: X4

Protection class: II

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 12

Number of units in the packaging: 12

Net unit weight [g]: 500

Grammage [g]: 616.67

Gross unit weight [g]: 582

Length of a unit pack [cm]: 14

Width of a unit pack [cm]: 13

Height of a unit pack [cm]: 11

Weight of a cardboard box [kg]: 7.40004

Width of a cardboard box [cm]: 29

Date of issue: 10.05.2024, 11:40

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Ducted fan

Height of a cardboard box [cm]: 28

Length of a cardboard box [cm] : 34.5

Volume of a cardboard box [m³] : 0.028014

ADDITIONAL INFORMATION:

- Rotation speed: 2550/min
- Efficiency 100m³/h
- Noise level 38dB (A)
- CYKLON EOL100HT, additionally equipped with a moisture sensor which allows the fan to activate after reaching a pre-set moisture threshold