


70937 CYKLON EOL100P

Ducted fan

8594056490370

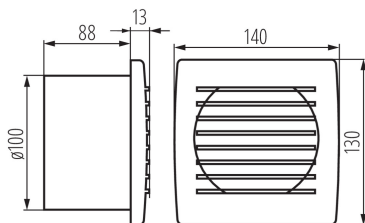

Kanlux CYKLON EOL series of fans is available in three sizes with diameter of 100, 120 and 150mm. They are made of plastic, in white colour. Their power is 19, 20 and 22W respectively. The number of rotations from each size comes to 2550/min.

GENERAL DATA:

Colour: white
Place of assembly: Recessed mount in the wall
Place of application: Indoors
Off switch: yes
Length [mm]: 140
Width [mm]: 101
Height [mm]: 130
Assembly hole [mm]: Ø100

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 19
Class of protection against electric shock: II
Engine rotation: 2550
Bearing type: sliding
Connection type: Terminal block
Range of sections of wires used [mm²]: 1
Sound pressure [dB]: 38
Air-flow volume rate [m³/h]: 100
Motor-power consumption [W]: 19
IP class: X4
Protection class: II

LOGISTIC DATA:

Packaging method: 12
Number of units in the packaging: 12
Net unit weight [g]: 440
Grammage [g]: 558.33
Length of a unit pack [cm]: 14
Width of a unit pack [cm]: 13
Height of a unit pack [cm]: 11
Weight of a cardboard box [kg]: 6.69996
Width of a cardboard box [cm]: 29
Height of a cardboard box [cm]: 28.5
Length of a cardboard box [cm]: 34
Volume of a cardboard box [m³]: 0.028101

Date of issue: 03.01.2023, 15:32

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Ducted fan

ADDITIONAL INFORMATION:

- Rotation speed: 2550/min
- Efficiency 100m³/h
- Noise level 38dB (A)
- CYKLON EOL100HT, additionally equipped with a moisture sensor which allows the fan to activate after reaching a pre-set moisture threshold