


70943 CYKLON EOL120T

Ducted fan

8594056490103

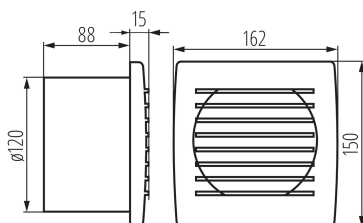

Kanlux CYKLON EOL series of fans is available in three sizes with diameter of 100, 120 and 150mm. They are made of plastic, in white colour. Their power is 19, 20 and 22W respectively. The number of rotations from each size comes to 2550/min.

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the wall

Place of application: Indoors

Time switch: yes

Length [mm]: 162

Width [mm]: 103

Height [mm]: 150

Assembly hole [mm]: Ø120

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 20

Class of protection against electric shock: II

Engine rotation: 2550

Bearing type: sliding

Connection type: Terminal block

Range of sections of wires used [mm²]: 1

Sound pressure [dB]: 38

Air Flow [m³/h]: 150

Motor-power consumption [W]: 20

IP class: X4

Protection class: II

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 12

Number of units in the packaging: 12

Net unit weight [g]: 530

Grammage [g]: 579.17

Gross unit weight [g]: 618

Length of a unit pack [cm]: 16

Width of a unit pack [cm]: 10.5

Height of a unit pack [cm]: 17

Weight of a cardboard box [kg]: 6.95004

Width of a cardboard box [cm]: 32.5

Height of a cardboard box [cm]: 32.5

Date of issue: 10.05.2024, 11:46

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Ducted fan

Length of a cardboard box [cm] : 35

Volume of a cardboard box [m³] : 0.036969

ADDITIONAL INFORMATION:

- Rotation speed: 2550/min
- Efficiency 150m³/h
- Noise level 38dB (A)
- CYKLON EOL120HT, additionally equipped with a moisture sensor which allows the fan to activate after reaching a pre-set moisture threshold