

In-ground lighting fitting

5905339071736



IP  
67



Kanlux BERG is a durable ground-recessed luminaire using a replaceable light source with an GU10 screw. It works great in illumination of driveways, alleys, sidewalks etc. It is manufactured of best quality materials owing to which can resist pressure up to 500 kg.

### GENERAL DATA:

**Colour:** stainless steel

**Place of assembly:** mounted on the ground, in-ground

**Place of application:** Indoors and outdoors

**Minimum distance from the illuminated object:** 0,5m

**Possibility of fixture-loop-through connection:** yes

**Replaceable light source:** yes

**Fixture lighting direction:** Top

**Length [mm]:** 110

**Width [mm]:** 110

**Height [mm]:** 145

**Number of chokes:** 2

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** max 10

**Class of protection against electric shock:** I

**Light source:** PAR16 LED

**Light source included:** no

**Cap:** GU10

**Ambient temperature range to which the product can be exposed:** -20÷35

**Enclosure material:** steel

**Panel/frame material:** stainless steel

**Protective glass material:** Tempered glass

**Connection type:** Bolt terminal block

**Range of sections of wires used [mm<sup>2</sup>]:** 1÷2,5

**Permissible static pressure [kN]:** 5

**IK class:** 08

**IP class:** 67

### LOGISTIC DATA:


**Packaging method:** 20

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 20

**Net unit weight [g]:** 842

In-ground lighting fitting

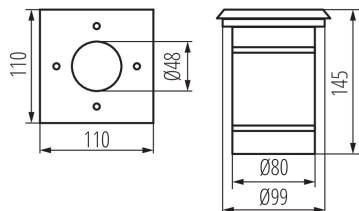

**Grammage [g]:** 942

**Length of a unit pack [cm]:** 11.5

**Width of a unit pack [cm]:** 11.5

**Height of a unit pack [cm]:** 16

**Weight of a cardboard box [kg]:** 18.84

**Width of a cardboard box [cm]:** 25

**Height of a cardboard box [cm]:** 33.5

**Length of a cardboard box [cm]:** 60.5

**Volume of a cardboard box [m<sup>3</sup>]:** 0.050669

