
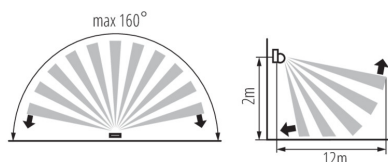


PIR motion sensor

5905339083906

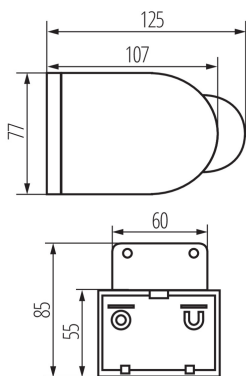

Kanlux SLICK JQ is a motion detector whose maximum detection range comes to 12 metres. You can set adjustments of the lighting time and light intensity level at which the detector works.

### GENERAL DATA:

**Colour:** white

**Place of assembly:** wall mounted

**Place of application:** Indoors and outdoors

**Micro-interval between relay contacts:** yes

**Length [mm]:** 77

**Width [mm]:** 125

**Height [mm]:** 85

**Diameter [mm]:** 85

### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Class of protection against electric shock:** II

**Material:** plastic

**Ambient temperature range to which the product can be exposed:** -10÷40

**Sensor type:** PIR

**Connection type:** Bolt terminal block

**Range of sections of wires used [mm<sup>2</sup>]:** 1÷2,5

**Sensor-operation time [second-minute]:** 8-10

**sensor working angle [°]:** H160/V20

**Maximum operating time [min]:** 10

**Minimum operating time[s]:** 8

**Maximum power [VA]:** 1200

**Illumination-level setpoint by which the sensor detects movement [lx]:** 3-2000

**IP class:** 44

**Sensor range[m]:** max 12

### LOGISTIC DATA:

**Packaging method:** 50

**Number of units in the packaging:** 50

**Net unit weight [g]:** 260

**Grammage [g]:** 330

**Length of a unit pack [cm]:** 9.5

**Width of a unit pack [cm]:** 8

**Height of a unit pack [cm]:** 13.5

**Weight of a cardboard box [kg]:** 16.5

**Width of a cardboard box [cm]:** 49

PIR motion sensor

**Height of a cardboard box [cm]:** 29

**Length of a cardboard box [cm] :** 51

**Volume of a cardboard box [m<sup>3</sup>]:** 0.072471

### **ADDITIONAL INFORMATION:**

- Maximum movement detection up to 12m
- Maximum horizontal angle of operation of the motion sensor - 160°
- Light on time adjustable from 8s to 10min
- Capability to set the light intensity of the environment in which the device works