


12755 MHE-250W/4200K

Metal-halide lamp

5905339127556



Kanlux MHE metal-halide lamps work with stabilizers for high-pressure sodium lamps/metal-halide lamps and igniters for metal-halide lamps.

TYPE OF LIGHT SOURCE:

Lighting technology used: MH

Non-directional or directional light source: NDLS

Mains or non-mains light source: NMLS

Connected light source (CLS): no

Colour-tuneable light source: no

Envelope: none

High luminance light source: no

Anti-glare shield: no

Dimmable: no

PRODUCT PARAMETERS:

Compatible with a dimmer: no

Width [mm]: 46

Height [mm]: 255

Depth [mm]: 46

Diameter [mm]: 46

Rated power [W]: 250

Material: glass

Colour temperature: white

Cap: E40

Rated lamp-service life [h]: 12000

Lamp-rated current [A]: 2.1

Rated luminous flux [lm]: 23000

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source (kWh/1000h): 250

Energy efficiency class: F

Useful luminous flux of the light source Φ_{use} [lm]: 23000

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Correlated colour temperature [K]: 4200

On-mode power of the light source P_{on} [W]: 250

Colour rendering index: 65


Chromaticity coordinates (x): 0.375

Chromaticity coordinates (y): 0.392

Claim of equivalent power [W]: 1177

12755 MHE-250W/4200K

Metal-halide lamp

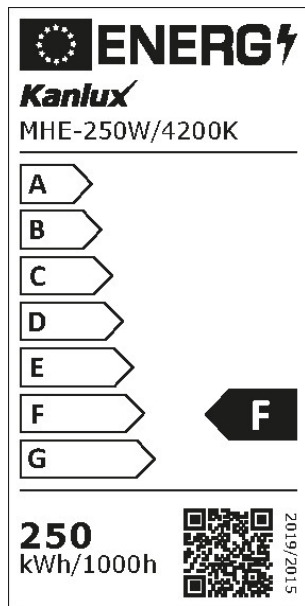

LOGISTIC DATA:

Packaging method: 25
Number of units in the packaging: 25
Net unit weight [g]: 170
Grammage [g]: 231.6
Length of a unit pack [cm]: 5
Width of a unit pack [cm]: 5
Height of a unit pack [cm]: 26
Weight of a cardboard box [kg]: 5.79
Width of a cardboard box [cm]: 26.5
Height of a cardboard box [cm]: 30
Length of a cardboard box [cm]: 26.5
Volume of a cardboard box [m³]: 0.021068

ADDITIONAL INFORMATION:

- metal-halide lamps work with stabilizers for high pressure sodium lamps, metal-halide lamps and starters for metal-halide lamps

