

14936 TANO G4 SMD-WW


LED light source 5907540962483























Kanlux TANO LED are light sources with G4 screw. This highly durable source has a very wide illumination angle (300°), perfect for sconces, lamps and other night luminaires matching light source with G4 screw.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED

Non-directional or directional light source: NDLS

Mains or non-mains light source: NMLS Connected light source (CLS): no

Colour-tuneable light source: no High luminance light source: no

Anti-glare shield: no Dimmable: no

PRODUCT PARAMETERS:

Colour: white

Compatible with a dimmer: no

Width [mm]: 10 Height [mm]: 35 **Depth [mm]**: 10 Diameter [mm]: 10 Mercury content: no Rated voltage [V]: 12 DC Lamp rated current [mA]: 130 Total rated luminous flux [lm]: 100

Rated beam angle [°]: 300

Material: plastic **Light source**: JC **Diode type**: LED SMD

Colour temperature: Warm white

Cap: G4

Rated lamp-service life [h]: 20000 Number of on/off cycles: ≥20000

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source


(kWh/1000h): 2

Energy efficiency class: G


Useful luminous flux of the light source **Φuse** [lm]: 100 Useful luminous flux of the light source Ouse [lm]: in

sphere (360°)

Correlated colour temperature [K]: 3000 Colour consistency in McAdam ellipses: ≤6 On-mode power of the light source Pon [W]: 1.5








TANO G4 SMD-WW 14936

LED light source

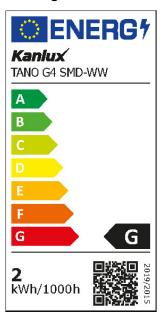

Height of the light source [mm]: 35 Width of the light source [mm]: 10 Depth of the light source [mm]: 10

Colour rendering index: 80

Chromaticity coordinates (x): 0.44 Chromaticity coordinates (y): 0.403 Claim of equivalent power [W]: 11 **R9** colour rendering index value: 20

Survival factor: ≥0.9

The lumen maintenance factor: 0.95

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

LOGISTIC DATA:

Packaging method: 20

Number of units in the secondary packaging: 20


Number of units in the packaging: 200

Net unit weight [g]: 3 **Grammage [g]**: 11.5


Length of a unit pack [cm]: 1.7 Width of a unit pack [cm]: 6 Height of a unit pack [cm]: 10 Weight of a cardboard box [kg]: 2.3 Width of a cardboard box [cm]: 23.5

Height of a cardboard box [cm]: 25 Length of a cardboard box [cm]: 57

Volume of a cardboard box [m³]: 0.033488

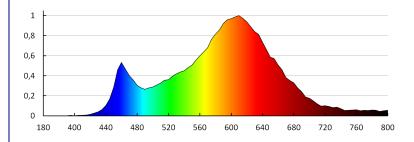





TANO G4 SMD-WW 14936

LED light source

