


18120 FOGLER DL-2400

sd2410

5905339181206

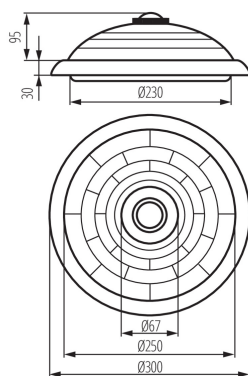

Kanlux FOGLER DL ceiling light fixture with a replaceable light source is a great choice for staircases, basements, attics and similar spaces. The built-in detector with the maximum angle (360°) of motion detection guarantees that the light turns on exactly when we need it.

PRODUCT PARAMETERS:**Colour:** white**Place of assembly:** wall mounted, ceiling mounted**Place of application:** Indoors**Minimum distance from the illuminated object :** 0,5m**Wykrywanie ruchu:** yes**Light source included:** no**Height [mm]:** 95**Diameter [mm]:** 300**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 2 x max 40**Class of protection against electric shock :** I**Lampshade material:** glass**Light source:** GLS/CFL/LED**Cap:** E27**Ambient temperature range to which the product can be exposed:** 5÷25**Enclosure material:** steel**Sensor type:** PIR**Connection type:** Bolt terminal block**Range of sections of wires used [mm²]:** 1-2,5**Sensor-operation time [second-minute]:** 12-5**sensor working angle [°]:** H360/V120**Illumination-level setpoint by which the sensor detects movement [lx]:** 3-2000**IP class:** 20**Sensor range[m]:** max 8**LOGISTIC DATA:****Packaging method:** 5**Number of units in the packaging:** 5**Net unit weight [g]:** 890**Grammage [g]:** 1334**Length of a unit pack [cm]:** 32**Width of a unit pack [cm]:** 11**Height of a unit pack [cm]:** 32

18120 FOGLER DL-2400

sd2410



Weight of a cardboard box [kg] : 6.67

Width of a cardboard box [cm] : 33

Height of a cardboard box [cm] : 35

Length of a cardboard box [cm] : 55

Volume of a cardboard box [m³] : 0.063525

ADDITIONAL INFORMATION:

- provided with a motion sensor
- maximum horizontal adjustment range for the motion sensor: 360°
- maximum vertical motion sensor angle: 120°
- lighting time adjustable in the range of 5 s to 5 min
- maximum motion detection range: 8 m
- motion detection 0.3...3 m/s (1...10 km/h)

KANLUX S.A. (kat 18120) FOGLER DL-2400 / Krzywa rozsyłu światła
(biegunowo)

Oprawa: KANLUX S.A. (kat 18120) FOGLER DL-2400
Lampy: 2 x A60 40W/c

