

18521 MAH PLUS-236-ABS/PC

Dustproof lighting fitting

5905339185211



Kanlux MAH PLUS are perfect as lighting of tunnels, industrial halls, garages, workshops, storage sheds or storehouses. Owing to the high class of tightness (IP65), the luminaires can be mounted in places directly exposed to weather conditions.

PRODUCT PARAMETERS:

Colour: grey

Place of assembly: ceiling mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Possibility of fixture-loop-through connection: yes

Compatible with a dimmer: no

Stabiliser/lamp start: cold

Light source included: no

Length [mm]: 1265

Width [mm]: 125

Height [mm]: 92

Number of chokes: 1

Number of clasps: 8

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 2 x 36

Class of protection against electric shock: I

Lampshade material: PC

Light source: T8

Cap: G13

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: plastic

Handle material: Metal

Clasp material: plastic

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 1÷2,5

Stabiliser type: EVG

Stabiliser energy class: A2

IP class: 65

LOGISTIC DATA:

Packaging method: 6

Number of units in the secondary packaging: 1

Number of units in the packaging: 6

Net unit weight [g]: 1880


Grammage [g]: 2266.67

Length of a unit pack [cm]: 128

Width of a unit pack [cm]: 13.5

18521 MAH PLUS-236-ABS/PC

Dustproof lighting fitting

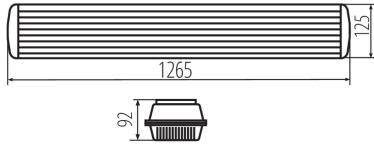

Height of a unit pack [cm]: 6.5

Weight of a cardboard box [kg]: 13.60002

Width of a cardboard box [cm]: 28

Height of a cardboard box [cm]: 21.5

Length of a cardboard box [cm]: 129


Volume of a cardboard box [m³]: 0.077658

ADDITIONAL INFORMATION:

- easy installation of the light fixture using the supplied snap-on mounting brackets
- suspended mounting plate for easier connection and maintenance of the light fixture
- barrier gland for inserting a power cable


KANLUX S.A. (kat 18521) MAH PLUS-236 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 18521) MAH PLUS-236
Lampy: 2 x T20 30W/327

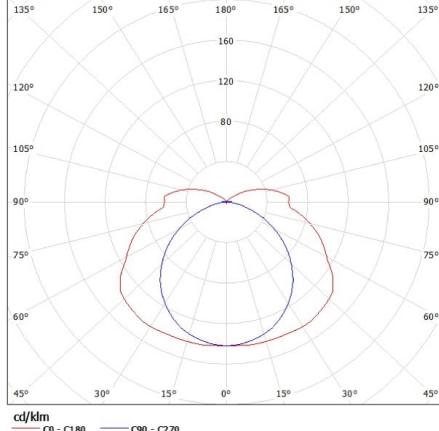

KANLUX S.A. (kat 18521) MAH PLUS-236 - T8 LED SMD / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 18521) MAH PLUS-236 - T8 LED SMD
Lampy: 2 x T8 LED SMD 18W-NW

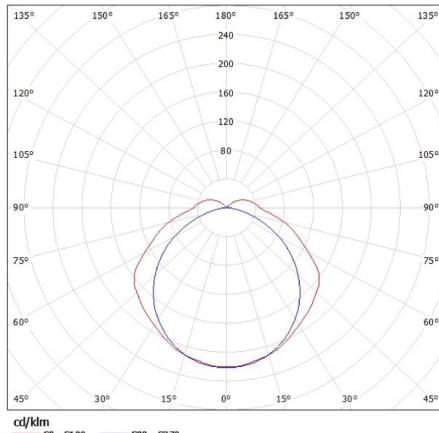

18521 MAH PLUS-236-ABS/PC

Dustproof lighting fitting

ACCESSORIES:**18593 CL-MAH PLUS**

Fitting clip MAH, CL-MAH PLUS, (18593)

**18594 CL-MAH PLUS-INOX**

Fitting clip MAH, CL-MAH PLUS-INOX, (18594)

**07870 ROPE-NT 150**

ROPE-NT 150 steel rope (double) for suspending fittings, 2 pcs. in a set

**07871 ROPE-NT 150 SINGLE**

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

