

19066 DABA PRO 26W NW-SE-W

Ceiling-mounted LED light fitting

5905339190666



Kanlux DABA PRO are ceiling lamps for professional use. We can choose a version without a motion sensor (25W) and with a sensor (26W) and two housing colors - white and black. Kanlux DABA PRO means IP65 tightness and high resistance to weather conditions, as well as resistance to mechanical damage IK10 and additional protection of the luminaire against opening.

Kanlux DABA PRO plafonds can be combined with each other on the MASTER → SLAVE principle, i.e. the first (first and last) luminaire with a sensor controls the series of luminaires. The high quality of Kanlux DABA PRO ceiling fixtures is confirmed by a 5-year warranty.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED

Non-directional or directional light source: NDLS

Mains or non-mains light source: NMLS

Connected light source (CLS): no

Colour-tunable light source: no

High luminance light source: no

Anti-glare shield: no

Dimmable: no

PRODUCT PARAMETERS:

Colour: white

Place of assembly: wall mounted, ceiling mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Possibility of fixture-loop-through connection: yes

Compatible with a dimmer: no

Wykrywanie ruchu: yes

Height [mm]: 85

Diameter [mm]: 300

Sensitivity regulation: yes

Mercury content: no

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 26

Class of protection against electric shock: II

Lampshade material: PC

Diode type: LED SMD


LED module: L-FC-B94-01-B-V2.0

Luminous flux of the light fitting [lm]: 2800

Colour temperature: white

19066 DABA PRO 26W NW-SE-W

Ceiling-mounted LED light fitting

**Service life [h]:** 50000**Luminous-flux-retention factor at the end of rated service life:** L80B10**Number of on/off cycles:** ≥25000**Lighting angle [°]:** 115**Ambient temperature range to which the product can be exposed:** -20÷40**Enclosure material:** plastic**Sensor type:** microwave**Connection type:** Self-clamping block**Range of sections of wires used [mm²]:** 0,75-2,5**Sensor-operation time [second-minute]:** 5-15**Lamp-heating time [s]:** ≤1**Lamp-ignition time [s]:** ≤0,5**Sensor-operation frequency [MHz]:** 5800**sensor working angle [°]:** 360**Illumination-level setpoint by which the sensor detects movement [lx]:** off/50/10/2**IK class:** 10**IP class:** 65**Sensor range[m]:** max 12**Additional information:** The LED light source can only be replaced by qualified personnel (Kanlux service only)**Additional information:** Any control panel or control equipment can only be replaced by qualified personnel (Kanlux service only)**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Energy consumption in on-mode of the light source (kWh/1000h):** 24**Useful luminous flux of the light source Φuse [lm]:** 3600**Useful luminous flux of the light source Φuse [lm]:** in sphere (360°)**Correlated colour temperature [K]:** 4000**Colour consistency in McAdam ellipses:** ≤6**On-mode power of the light source Pon [W]:** 24**Height of the light source [mm]:** 264**Width of the light source [mm]:** 264**Depth of the light source [mm]:** 7**Colour rendering index:** 80**Chromaticity coordinates (x):** 0,38**Chromaticity coordinates (y):** 0,38**R9 colour rendering index value:** 12**Survival factor:** 0,9**The lumen maintenance factor:** 0,96

19066 DABA PRO 26W NW-SE-W

Ceiling-mounted LED light fitting

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

LOGISTIC DATA:

Packaging method: 5

Number of units in the secondary packaging: 1

Number of units in the packaging: 5

Net unit weight [g]: 880

Grammage [g]: 1276

Length of a unit pack [cm]: 32

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 32.5

Weight of a cardboard box [kg]: 6.38

Width of a cardboard box [cm]: 34


Height of a cardboard box [cm]: 34

Length of a cardboard box [cm]: 57.5

Volume of a cardboard box [m³]: 0.06647

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

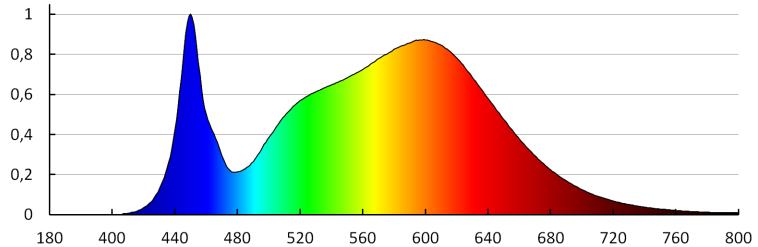

19066 DABA PRO 26W NW-SE-W

Ceiling-mounted LED light fitting

KANLUX S.A. (kat 19066) DABA PRO 26W NW-SE-W / LDC (Polar)

Luminaire: KANLUX S.A. (kat 19066) DABA PRO 26W NW-SE-W
Lamps: 1 x DABA PRO 25W NW