
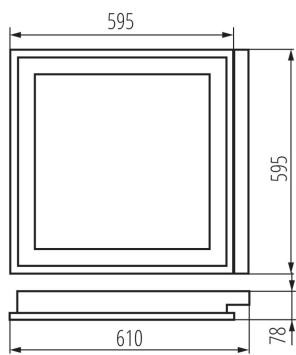


19734 REGIS 3 OPAL 418 PT

Embedded louver fitting

5905339197344



Kanlux REGIS are raster recessed luminaires that can be mounted quickly and easily with spring clips and quick couplings. Raster lighting is still a very popular solution for office and industrial spaces.

PRODUCT PARAMETERS:**Colour:** white**Place of assembly:** Recessed mount in the ceiling**Place of application:** Indoors**Minimum distance from the illuminated object:** 0,5m**Stabiliser/lamp start:** cold**The product is not suitable to be covered with a heat-insulating material:** yes**Light source included:** no**Length [mm]:** 610**Width [mm]:** 595**Height [mm]:** 78**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 4 x 18**Class of protection against electric shock:** I**Lampshade material:** PMMA**Light source:** T8**Cap:** G13**Ambient temperature range to which the product can be exposed:** 5÷25**Enclosure material:** steel**Reflector material:** aluminum alloy**Connection type:** Self-clamping block**Range of sections of wires used [mm²]:** 1÷2,5**Stabiliser type:** EVG**Stabiliser energy class:** A2**IP class:** 40**LOGISTIC DATA:****Packaging method:** 1**Number of units in the secondary packaging:** 1**Number of units in the packaging:** 1**Net unit weight [g]:** 2910**Grammage [g]:** 3500**Length of a unit pack [cm]:** 65**Width of a unit pack [cm]:** 62.5**Height of a unit pack [cm]:** 8.5**Weight of a cardboard box [kg]:** 3.5**Width of a cardboard box [cm]:** 63


19734 REGIS 3 OPAL 418 PT

Embedded louver fitting

**Height of a cardboard box [cm]:** 8.8**Length of a cardboard box [cm] :** 65.5**Volume of a cardboard box [m³]:** 0.036313**ADDITIONAL INFORMATION:**

- half-parabolic reflector / V-shaped grille cross-bars / fluorescent lamp sockets concealed with a reflector
- the casing is provided with openings for feed-through power supply
- protective conductor on the grille providing additional protection against electric shock
- easy installation of the grille on spring hooks
- quick coupling for connecting the power supply, easier and quicker installation, Class A2 TRIDONIC ballast
- powder coating

KANLUX S.A. (kat 19734) REGIS 3 OPAL 418 / Krzywa rozsyłu światła (biegunowo)

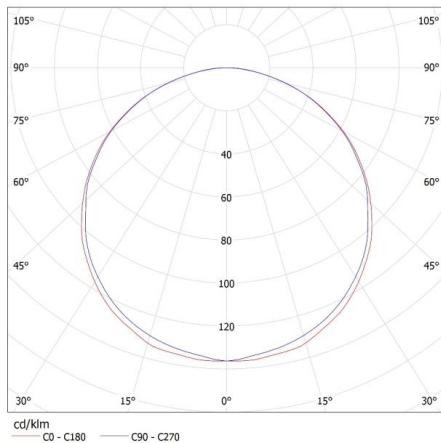Oprawa: KANLUX S.A. (kat 19734) REGIS 3 OPAL 418
Lampy: 4 x T26 18W/827**ACCESSORIES:****72333 CLP-REGIS/PT**

CLP-REGIS/PT mounting support, used for building in fittings in a plasterboard suspended ceiling. 4 pcs. in a set.

