


19925 T8 36W/865 CW

Linear fluorescent lamp

5905339199256

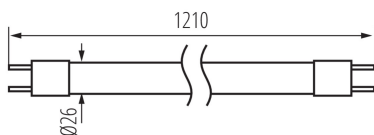

Kanlux T8 are triband linear fluorescent lamps. Low consumption of energy and long working time (15.000H) are indisputable advantages of these lamps.

TYPE OF LIGHT SOURCE:

Lighting technology used: inne FL
Non-directional or directional light source: NDLS
Mains or non-mains light source: NMLS
Connected light source (CLS): no
Colour-tuneable light source: no
High luminance light source: no
Anti-glare shield: no
Dimmable: no

PRODUCT PARAMETERS:


Compatible with a dimmer: no
Length [mm]: 1210
Width [mm]: 26
Depth [mm]: 26
Diameter [mm]: 26
Mercury content: yes
Rated power [W]: 36
Material: glass
Light source: T8
Colour temperature: cold white
Cap: G13
Rated lamp-service life [h]: 15000
Rated luminous flux [lm]: 3050

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source (kWh/1000h): 36
Energy efficiency class: G
Useful luminous flux of the light source Φ_{use} [lm]: 3050
Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)
Correlated colour temperature [K]: 6500
On-mode power of the light source P_{on} [W]: 36
Colour rendering index: 80
Chromaticity coordinates (x): 0.313
Chromaticity coordinates (y): 0.337
Claim of equivalent power [W]: 179

19925 T8 36W/865 CW

Linear fluorescent lamp

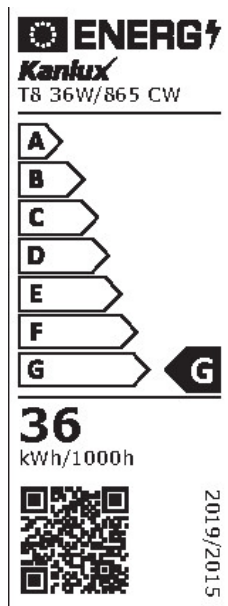

LOGISTIC DATA:

Packaging method: 25
Number of units in the secondary packaging: 1
Number of units in the packaging: 25
Net unit weight [g]: 170
Grammage [g]: 210.4
Length of a unit pack [cm]: 121.5
Width of a unit pack [cm]: 2.5
Height of a unit pack [cm]: 2.5
Weight of a cardboard box [kg]: 5.26
Width of a cardboard box [cm]: 16
Height of a cardboard box [cm]: 16.5
Length of a cardboard box [cm]: 120
Volume of a cardboard box [m³]: 0.03168

