


## 23152 KMB6-B20/3

Overcurrent circuit breaker, 3P

5905339231529

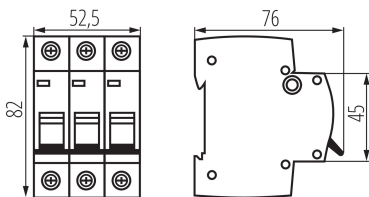

Circuit breaker with overcurrent protection is used to protect cables against overloads and short circuits in installations and devices.

### PRODUCT PARAMETERS:

**Rated voltage [V]:** 230/400 AC

**Rated frequency [Hz]:** 50

**Rated current [A]:** 20

**Colour:** white

**Place of assembly:** na szynę TH35

**IP class:** 20

**Norm:** PN-EN 60898-1

**Length [mm]:** 76

**Width [mm]:** 52.5

**Height [mm]:** 82

**Ambient temperature range to which the product can be exposed:** -5÷40

**Range of sections of wires used [mm<sup>2</sup>]:** 1÷25

**Terminal capacity – solid conductor [mm<sup>2</sup>]:** max 25

**Terminal capacity – stranded conductor [mm<sup>2</sup>]:** max 16

**Release characteristics:** B

**Energy-limit class:** 3

**Number of modules:** 3

**Rated short-circuit current [A]:** 6000

**Rated insulation voltage UI [V]:** 500

**Number of poles:** 3

**Mechanical endurance:** 10000

**Electrical endurance:** 4000

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 4

**Number of units in the secondary packaging:** 4

**Number of units in the packaging:** 40

**Net unit weight [g]:** 300

**Grammage [g]:** 330

**Gross unit weight [g]:** 301

**Length of a unit pack [cm]:** 5.5

## 23152 KMB6-B20/3

---

Overcurrent circuit breaker, 3P

**Width of a unit pack [cm]:** 7.5  
**Height of a unit pack [cm]:** 8.5  
**Weight of a cardboard box [kg]:** 13.2  
**Width of a cardboard box [cm]:** 25  
**Height of a cardboard box [cm]:** 19.5  
**Length of a cardboard box [cm]:** 45  
**Volume of a cardboard box [m³]:** 0.021938