


23172 KMB6-B50/3

Overcurrent circuit breaker, 3P

5905339231727



Circuit breaker with overcurrent protection is used to protect cables against overloads and short circuits in installations and devices.

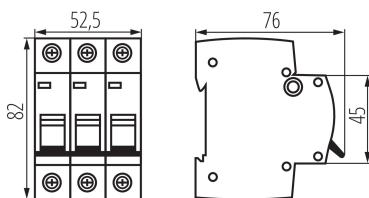

PRODUCT PARAMETERS:

Rated voltage [V]: 230/400 AC
Rated frequency [Hz]: 50
Rated current [A]: 50
Colour: white
Place of assembly: na szynę TH35
IP class: 20
Norm: PN-EN 60898-1
Length [mm]: 76
Width [mm]: 52.5
Height [mm]: 82
Ambient temperature range to which the product can be exposed: -5÷40
Range of sections of wires used [mm²]: 1÷25
Terminal capacity – solid conductor [mm²]: max 25
Terminal capacity – stranded conductor [mm²]: max 16
Release characteristics: B
Energy-limit class: 3
Number of modules: 3
Rated short-circuit current [A]: 6000
Rated insulation voltage UI [V]: 500
Number of poles: 3
Mechanical endurance: 10000
Electrical endurance: 4000

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 4
Number of units in the secondary packaging: 4
Number of units in the packaging: 40
Net unit weight [g]: 300
Grammage [g]: 330
Gross unit weight [g]: 318
Length of a unit pack [cm]: 5.5

23172 KMB6-B50/3

Overcurrent circuit breaker, 3P

Width of a unit pack [cm]	: 7.5
Height of a unit pack [cm]	: 8.5
Weight of a cardboard box [kg]	: 13.2
Width of a cardboard box [cm]	: 25
Height of a cardboard box [cm]	: 19.5
Length of a cardboard box [cm]	: 45
Volume of a cardboard box [m³]	: 0.021938

Date of issue: 15.12.2025, 16:40

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com