


23257 KCS-40A/3P

Installation switch

5905339232571

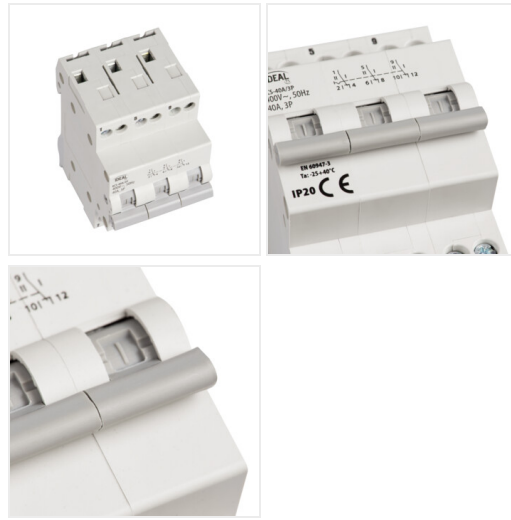

PRODUCT PARAMETERS

Rated voltage [V]	230/400 AC
Rated frequency [Hz]	50
Rated current [A]	40
Utilisation category	AC-22A
Place of application	Indoors
IP class	20
Norm	PN-EN 60947-3
Control type	mechaniczne
Number of modules	3
Tightening force [Nm]	1,2
Electrical endurance	2000
Number of poles	3 (9)

DIMENSIONS AND MOUNTING

Height [mm]	88.5
Width [mm]	52.8

MATERIAL AND CONSTRUCTION

Ambient temperature range to which the product can be exposed	-25+40
---	--------

Date of issue: 27.03.2026, 09:11

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

DIMENSIONS AND MOUNTING

Length [mm]	76
Connection type	Terminal block
Range of sections of wires used [mm ²]	max 16

LOGISTICS

Unit of measurement	unit
Packaging method	40
Number of units in the secondary packaging	1
Number of units in the packaging	40
Net unit weight [g]	224
Grammage [g]	256.25
Gross unit weight [g]	244
Length of a unit pack [cm]	5.7
Width of a unit pack [cm]	9
Height of a unit pack [cm]	7.8
Weight of a cardboard box [kg]	10.25
Width of a cardboard box [cm]	26
Height of a cardboard box [cm]	19.5
Length of a cardboard box [cm]	51.5
Volume of a cardboard box [m ³]	0.026111

Date of issue: 27.03.2026, 09:11

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com