


23333 KTB-125-15-M

Distribution block

5905339233332

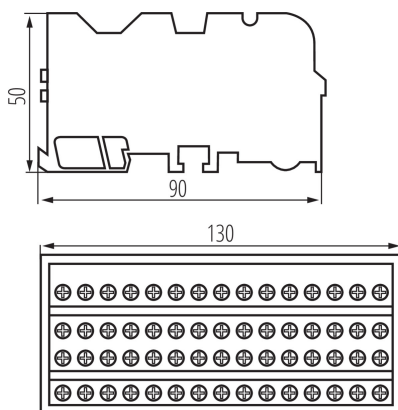

Terminal block is used for power distribution, it is adapted to cable lugs.

PRODUCT PARAMETERS:

Colour: white

Place of assembly: rail TH35

Norm: PN-EN 60947-7-1

Rated voltage [V]: 500 AC

Rated current [A]: 125

Rated frequency [Hz]: 50

LOGISTIC DATA:

Packaging method: 50

Number of units in the secondary packaging: 1

Number of units in the packaging: 50

Net unit weight [g]: 420

Grammage [g]: 470

Length of a unit pack [cm]: 14

Width of a unit pack [cm]: 9.5

Height of a unit pack [cm]: 6

Weight of a cardboard box [kg]: 23.5

Width of a cardboard box [cm]: 29

Height of a cardboard box [cm]: 30.5

Length of a cardboard box [cm]: 47

Volume of a cardboard box [m³]: 0.041572