
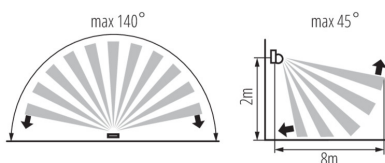


23450 ALER MINI-W

PIR motion sensor

5905339234506



ALER MINI-W sensor is a small infrared sensor with attractive and minimalistic design. The horizontal angle of the sensor work comes to 140°, and vertical 45°, and thanks to easy mechanical adjustment (vertical 45°, level 90°) it can be adapted to your needs. Owing to the high class of tightness (IP44), this sensor can be mounted in places directly exposed to weather conditions.

PRODUCT PARAMETERS:**Colour:** white**Place of assembly:** wall mounted**Place of application:** Indoors and outdoors**Micro-interval between relay contacts:** yes**Width [mm]:** 80**Height [mm]:** 67**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Class of protection against electric shock:** II**Material:** plastic**Ambient temperature range to which the product can be exposed:** -20÷40**Sensor type:** PIR**Connection type:** Bolt terminal block**Range of sections of wires used [mm²]:** 1÷2,5**Sensor-operation time [second-minute]:** 10-15**sensor working angle [°]:** H140/V45**Maximum operating time [min]:** 15**Minimum operating time[s]:** 10**Maximum power [VA]:** 800**Illumination-level setpoint by which the sensor detects movement [lx]:** 3-2000**IP class:** 44**Sensor range[m]:** max 8**LOGISTIC DATA:****Packaging method:** 50**Number of units in the secondary packaging:** 1**Number of units in the packaging:** 50**Net unit weight [g]:** 100**Grammage [g]:** 142.6**Length of a unit pack [cm]:** 8.5**Width of a unit pack [cm]:** 6**Height of a unit pack [cm]:** 8.5**Weight of a cardboard box [kg]:** 7.13

23450 ALER MINI-W

PIR motion sensor

Width of a cardboard box [cm]: 35
Height of a cardboard box [cm]: 19
Length of a cardboard box [cm] : 44.5
Volume of a cardboard box [m³]: 0.029593

ADDITIONAL INFORMATION:

- Maximum movement detection up to 8m
- Maximum horizontal angle of operation of the motion sensor
- 140°
- Light on time adjustable from 10s to 15min
- Capability to set the light intensity of the environment in which the device works