


23616 KDB-F06T

KDB-series distribution board

5905339236166

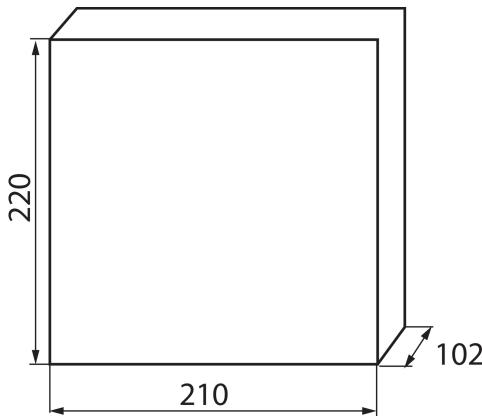

KDB series switchboards meeting the requirement for heat resistance at the temperature of 650°C, can be used on non-flammable surfaces only (e.g. full solid walls made of non-combustible materials). They cannot be used on flammable surfaces (e.g. plasterboard, wood boards, etc.), on the so-called "hollow walls" or on technical sections

PRODUCT PARAMETERS:

Colour: white / blue

Door colour: blue

Place of assembly: Recessed mount in the wall

Norm: PN-EN 62208

Length [mm]: 210

Width [mm]: 102

Height [mm]: 220

Rated voltage [V]: 230/400 AC

Rated current [A]: 63

Rated frequency [Hz]: 50

Class of protection against electric shock : II

Material: plastic

Number of modules: 6P

Temperature resistance [°C]: 650

IK class: 07

IP class: 30

number of rows: 1

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 20

Number of units in the secondary packaging : 1

Number of units in the packaging : 20

Net unit weight [g]: 550

Grammage [g]: 774

Gross unit weight [g]: 652

Length of a unit pack [cm]: 21.5

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 22.5

Weight of a cardboard box [kg]: 15.48

Width of a cardboard box [cm]: 45

Height of a cardboard box [cm]: 48

Length of a cardboard box [cm] : 57.5

23616 KDB-F06T

KDB-series distribution board

| **Volume of a cardboard box [m³]** : 0.1242