
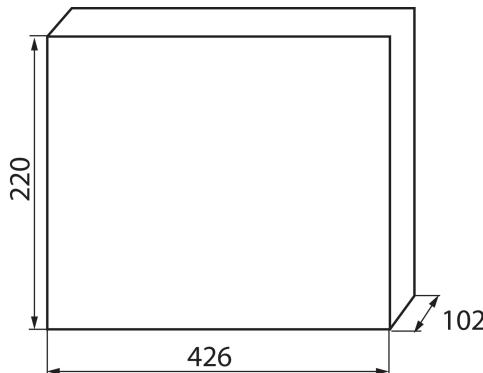


## 23619 KDB-F18T

KDB-series distribution board

5905339236197

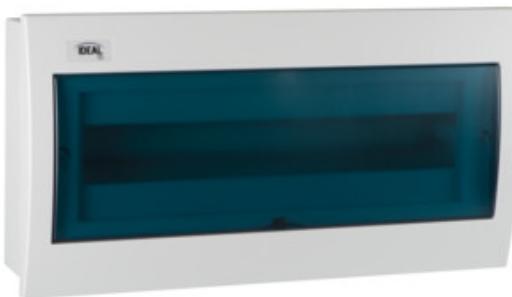

KDB series switchboards meeting the requirement for heat resistance at the temperature of 650°C, can be used on non-flammable surfaces only (e.g. full solid walls made of non-combustible materials). They cannot be used on flammable surfaces (e.g. plasterboard, wood boards, etc.), on the so-called "hollow walls" or on technical sections

### PRODUCT PARAMETERS:

**Colour:** white / blue

**Door colour:** blue

**Place of assembly:** Recessed mount in the wall

**Norm:** PN-EN 62208

**Length [mm]:** 426

**Width [mm]:** 102

**Height [mm]:** 220

**Rated voltage [V]:** 230/400 AC

**Rated current [A]:** 63

**Rated frequency [Hz]:** 50

**Class of protection against electric shock :** II

**Material:** plastic

**Number of modules:** 18P

**Temperature resistance [°C]:** 650

**IK class:** 07

**IP class:** 30

**number of rows:** 1

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 10

**Number of units in the secondary packaging :** 1

**Number of units in the packaging :** 10

**Net unit weight [g]:** 1100

**Grammage [g]:** 1478

**Gross unit weight [g]:** 1312

**Length of a unit pack [cm]:** 22.5

**Width of a unit pack [cm]:** 11

**Height of a unit pack [cm]:** 43.5

**Weight of a cardboard box [kg]:** 14.78

**Width of a cardboard box [cm]:** 48

**Height of a cardboard box [cm]:** 46

**Length of a cardboard box [cm] :** 58

**23619 KDB-F18T**

KDB-series distribution board

| **Volume of a cardboard box [m<sup>3</sup>]** : 0.128064