


23621 KDB-F36T

KDB-series distribution board

5905339236210

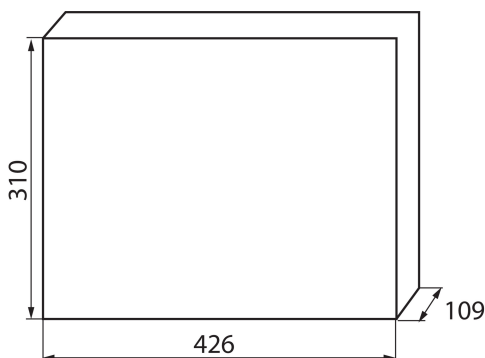

KDB series switchboards meeting the requirement for heat resistance at the temperature of 650°C, can be used on non-flammable surfaces only (e.g. full solid walls made of non-combustible materials). They cannot be used on flammable surfaces (e.g. plasterboard, wood boards, etc.), on the so-called "hollow walls" or on technical sections

PRODUCT PARAMETERS:

Colour: white / blue
Door colour: blue
Place of assembly: Recessed mount in the wall
Norm: PN-EN 62208
Length [mm]: 426
Width [mm]: 109
Height [mm]: 310
Rated voltage [V]: 230/400 AC
Rated current [A]: 63
Rated frequency [Hz]: 50
Class of protection against electric shock: II
Material: plastic
Number of modules: 2x18P
Temperature resistance [°C]: 650
IK class: 07
IP class: 30
number of rows: 2

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 5
Number of units in the secondary packaging: 1
Number of units in the packaging: 5
Net unit weight [g]: 1700
Grammage [g]: 2250
Gross unit weight [g]: 2018
Length of a unit pack [cm]: 33
Width of a unit pack [cm]: 11.5
Height of a unit pack [cm]: 43.5
Weight of a cardboard box [kg]: 11.25
Width of a cardboard box [cm]: 35
Height of a cardboard box [cm]: 46
Length of a cardboard box [cm]: 59

23621 KDB-F36T

KDB-series distribution board

| Volume of a cardboard box [m³] : 0.09499