

## 24074 KMP-32,0

KMP motor protection switch

5905339240743



Motor circuit breaker is used for protect three-phase motor circuits. We have accessories adjusted to the breakers - auxiliary contacts, triggers and tight housing.

### PRODUCT PARAMETERS:

**Utilisation category:** AC-3

**Colour:** white

**Place of assembly:** rail TH35

**Norm:** PN-EN 60947-4-1

**Connection type:** Terminal block

**Rated breaking voltage Ue [V]:** 400

**Thermal-power I<sub>the</sub> [A]:** 32

**IP class:** 20

**Instantaneous release [A]:** 416

**Overcurrent-release setpoint range [A]:** 24-32

**3-phase rated power - 230/240V [kW]:** 7.5

**3-phase rated power - 400 V [kW]:** 15

**3-phase rated power - 440 V [kW]:** 15

**3-phase rated power - 500 V [kW]:** 18.5

**3-phase rated power - 690 V [kW]:** 22

**Rated insulation voltage U<sub>i</sub> [V]:** 690

**Rated impulse withstand voltage U<sub>imp</sub> [V]:** 6000

### LOGISTIC DATA:

**Packaging method:** 50

**Number of units in the secondary packaging:** 1

**Number of units in the packaging:** 50

**Net unit weight [g]:** 260

**Grammage [g]:** 281.4

**Length of a unit pack [cm]:** 9

**Width of a unit pack [cm]:** 4.5

**Height of a unit pack [cm]:** 8.5


**Weight of a cardboard box [kg]:** 14.07

**Width of a cardboard box [cm]:** 25.5

**Height of a cardboard box [cm]:** 18

**Length of a cardboard box [cm]:** 47

**Volume of a cardboard box [m<sup>3</sup>]:** 0.021573

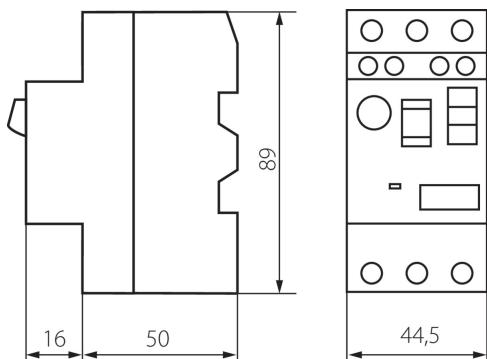

**IDEAL**<sup>(TS)</sup>

by **Kanlux**

ul. Objazdowa 1-3, 41-922 Radzionków, Poland

## **24074 KMP-32,0**

---

KMP motor protection switch

Date of issue: 15.11.2022, 10:57

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

**EN**