

25068 LOGI 02-1021-102 bi

Control Switch (no symbol)

5905339250681




A NO switch is used to control time relays with an impulse (controlling the circuit of a lamp or a group of lamps, controlling door and gate mechanisms).

PRODUCT PARAMETERS:

Colour: white
Place of assembly: Recessed mount in the wall
Width [mm]: 71
Height [mm]: 71
Diameter of an installation box: 60
Installation depth: 25
Rated voltage [V]: 250 AC
Material of contacts: CuZn70
Terminal type: Screw terminal
Plastic: ABS
Number of levers: 1
Rated current [AX]: 10
IP class: 20

LOGISTIC DATA:

Packaging method: 10
Number of units in the secondary packaging: 10
Number of units in the packaging: 120
Net unit weight [g]: 70
Grammage [g]: 82.25
Length of a unit pack [cm]: 10
Width of a unit pack [cm]: 4
Height of a unit pack [cm]: 14
Weight of a cardboard box [kg]: 9.87
Width of a cardboard box [cm]: 25.5
Height of a cardboard box [cm]: 32
Length of a cardboard box [cm]: 44
Volume of a cardboard box [m³]: 0.035904

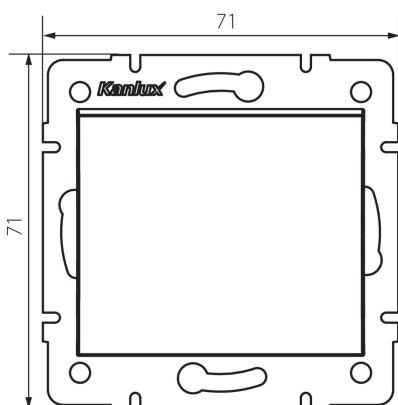



by **Kanlux** ul. Objazdowa 1-3, 41-922 Radzionków, Poland

25068 LOGI 02-1021-102 bi

Control Switch (no symbol)