

## 25092 LOGI 02-1253-102 bi

Type E double power socket with earthing terminal

5905339250926



A double grounded socket outlet allows you to power electrical circuits with a maximum load of 16A.

### PRODUCT PARAMETERS:

**Colour:** white

**Place of assembly:** Recessed mount in the wall

**Width [mm]:** 71

**Height [mm]:** 71

**Diameter of an installation box:** 60

**Installation depth:** 25

**Number of sockets:** 2

**Rated voltage [V]:** 250 AC

**Rated current [A]:** 16

**Class of protection against electric shock:** I

**Material of contacts:** CuZn70

**Earthing type:** Type E

**Terminal type:** Screw terminal

**Plastic:** ABS

**IP class:** 20

### LOGISTIC DATA:

**Packaging method:** 10

**Number of units in the secondary packaging:** 10

**Number of units in the packaging:** 120

**Net unit weight [g]:** 84

**Grammage [g]:** 101.67

**Length of a unit pack [cm]:** 10

**Width of a unit pack [cm]:** 5

**Height of a unit pack [cm]:** 14


**Weight of a cardboard box [kg]:** 12.2004

**Width of a cardboard box [cm]:** 25.5

**Height of a cardboard box [cm]:** 32

**Length of a cardboard box [cm]:** 44

**Volume of a cardboard box [m³]:** 0.035904

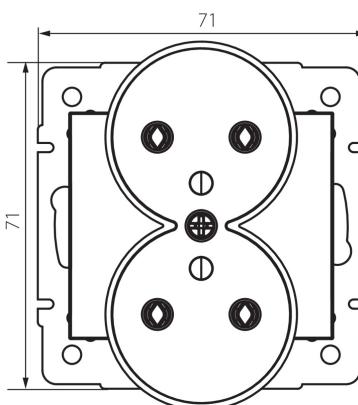



by **Kanlux**

ul. Objazdowa 1-3, 41-922 Radzionków, Poland

**25092** LOGI 02-1253-102 bi

---

Type E double power socket with earthing terminal