



by **Kanlux**

ul. Objazdowa 1-3, 41-922 Radzionków, Poland



## 25189 LOGI 02-1023-143 sr

Double Control Switch Illuminated

5905339251893



A double NO switch is used to control two groups of time relays with an impulse (controlling the circuit of a lamp or a group of lamps, controlling door and gate mechanisms). The switch has LED backlight.

### PRODUCT PARAMETERS:

**Colour:** silver

**Place of assembly:** Recessed mount in the wall

**Highlighting:** yes

**Width [mm]:** 71

**Height [mm]:** 71

**Diameter of an installation box:** 60

**Installation depth:** 25

**Rated voltage [V]:** 250 AC

**Material of contacts:** CuZn70

**Terminal type:** Screw terminal

**Plastic:** ABS

**Number of levers:** 2

**Rated current [AX]:** 10

**IP class:** 20

### LOGISTIC DATA:

**Packaging method:** 10

**Number of units in the secondary packaging:** 10

**Number of units in the packaging:** 120

**Net unit weight [g]:** 74

**Grammage [g]:** 86.67

**Length of a unit pack [cm]:** 10

**Width of a unit pack [cm]:** 4

**Height of a unit pack [cm]:** 14


**Weight of a cardboard box [kg]:** 10.4004

**Width of a cardboard box [cm]:** 25.5

**Height of a cardboard box [cm]:** 32

**Length of a cardboard box [cm]:** 44

**Volume of a cardboard box [m<sup>3</sup>]:** 0.035904

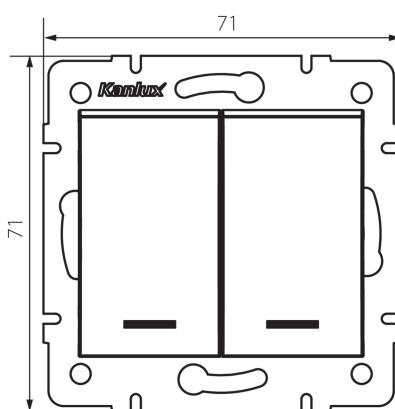

Date of issue: 15.11.2022, 22:45

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

**EN**



by **Kanlux**

ul. Objazdowa 1-3, 41-922 Radzionków, Poland



**25189** LOGI 02-1023-143 sr

---

Double Control Switch Illuminated