



by **Kanlux**

ul. Objazdowa 1-3, 41-922 Radzionków, Poland



25193 LOGI 02-1070-143 sr

Cross connector

5905339251930



A crossbar switch is used for cooperation with single-pole double-throw switches in order to control the circuit of a lamp or a group of lamps from more than two places. A crossbar switch is installed between single-pole double-throw switches.

PRODUCT PARAMETERS:

Colour: silver

Place of assembly: Recessed mount in the wall

Highlighting: no

Width [mm]: 71

Height [mm]: 71

Diameter of an installation box: 60

Installation depth: 25

Rated voltage [V]: 250 AC

Material of contacts: CuZn70

Terminal type: Screw terminal

Plastic: ABS

Number of levers: 1

Rated current [AX]: 10

IP class: 20

LOGISTIC DATA:

Packaging method: 10

Number of units in the secondary packaging: 10

Number of units in the packaging: 120

Net unit weight [g]: 74

Grammage [g]: 86

Length of a unit pack [cm]: 10

Width of a unit pack [cm]: 4

Height of a unit pack [cm]: 14


Weight of a cardboard box [kg]: 10.32

Width of a cardboard box [cm]: 25.5

Height of a cardboard box [cm]: 32

Length of a cardboard box [cm]: 44

Volume of a cardboard box [m³]: 0.035904

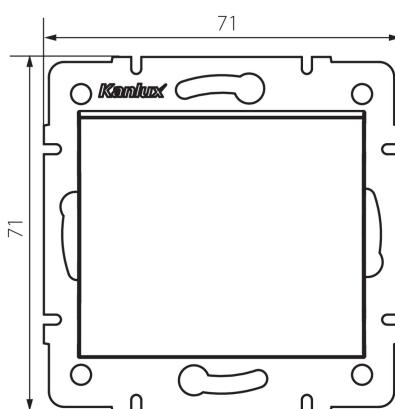

Date of issue: 15.11.2022, 22:17

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

EN



by **Kanlux**

ul. Objazdowa 1-3, 41-922 Radzionków, Poland



25193 LOGI 02-1070-143 sr

Cross connector

Date of issue: 15.11.2022, 22:17

We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN