


25217 LOGI 02-1310-143 sr

Control Shutter Switch

5905339252173

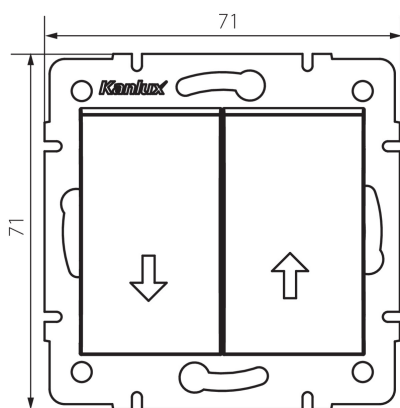

A roller blind switch is used to control power supply systems of external roller blinds. The switch comes with two buttons for moving roller blinds up and down. The switch has a system that makes it impossible to press both buttons at the same time. A monostable switch does not maintain the position, i.e. it goes back to the previous position after pressing.

PRODUCT PARAMETERS:

Colour: silver

Place of assembly: Recessed mount in the wall

Highlighting: no

Width [mm]: 71

Height [mm]: 71

Diameter of an installation box: 60

Installation depth: 25

Rated voltage [V]: 250 AC

Material of contacts: CuZn70

Terminal type: Screw terminal

Plastic: ABS

Number of levers: 2

Rated current [AX]: 10

IP class: 20

LOGISTIC DATA:

Packaging method: 10

Number of units in the secondary packaging: 10

Number of units in the packaging: 120

Net unit weight [g]: 74

Grammage [g]: 86.33

Length of a unit pack [cm]: 10

Width of a unit pack [cm]: 4

Height of a unit pack [cm]: 14

Weight of a cardboard box [kg]: 10.3596

Width of a cardboard box [cm]: 25.5

Height of a cardboard box [cm]: 32



by **Kanlux** ul. Objazdowa 1-3, 41-922 Radzionków, Poland

25217 LOGI 02-1310-143 sr

Control Shutter Switch

Length of a cardboard box [cm] : 44

Volume of a cardboard box [m³]: 0.035904