

25264 LOGI 02-1230-141 gr

Socket Outlet Earthed - With Protection Cover - FireProof Plastic

5905339252647




A grounded single socket outlet (Schuko) allows you to power an electrical circuit with a maximum load of 16A. In addition, the socket outlet has a hinged lid, thanks to which it maintains the IP rating of IP 44 and may be installed in areas with splash water (bathrooms).

PRODUCT PARAMETERS:

Colour: graphite
Place of assembly: Recessed mount in the wall
Width [mm]: 71
Height [mm]: 71
Diameter of an installation box: 60
Installation depth: 25
Number of sockets: 1
Rated voltage [V]: 250 AC
Rated current [A]: 16
Class of protection against electric shock: I
Material of contacts: CuZn70
Earthing type: type F
Terminal type: Screw terminal
Plastic: ABS
IP class: 44

LOGISTIC DATA:

Packaging method: 10
Number of units in the secondary packaging: 10
Number of units in the packaging: 120
Net unit weight [g]: 76
Grammage [g]: 89.75
Length of a unit pack [cm]: 9
Width of a unit pack [cm]: 5
Height of a unit pack [cm]: 14
Weight of a cardboard box [kg]: 10.77
Width of a cardboard box [cm]: 26.5
Height of a cardboard box [cm]: 32

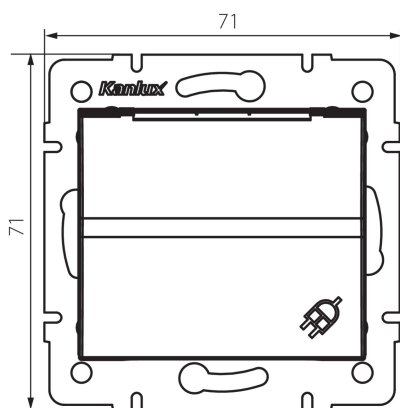



by **Kanlux**

ul. Objazdowa 1-3, 41-922 Radzionków, Poland



25264 LOGI 02-1230-141 gr

Socket Outlet Earthed - With Protection Cover - FireProof Plastic

Length of a cardboard box [cm] : 44

Volume of a cardboard box [m³]: 0.037312