


02553 NAVI CTX-DT10-C/M

Ceiling-mounted spotlight fitting

5905339025531

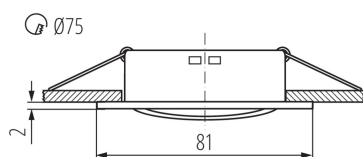

Kanlux NAVI is a family of simple in their form, diverse spot-beam holders with very broad possibilities of use.

PRODUCT PARAMETERS:

Colour: chrome matte

Necessity of using self-shielding lamps: yes

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

The product is not suitable to be installed on a normally flammable surface: >35W

The product is not suitable to be covered with a heat-insulating material: yes

Light source included: no

Height [mm]: 21

Diameter [mm]: 81

Assembly hole [mm]: Ø75

Rated voltage [V]: 12 AC; 12 DC

Maximum power [W]: max 10

Class of protection against electric shock: III

Light source: MR16

Cap: Gx5,3

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: aluminum alloy

Connection type: Free cable ends

Wire length [m]: 0.12

Wire diameter [mm²]: 0.75

Lighting-fixture angle regulation: in one axis

Lighting-fixture angle regulation [°]: 15

IP class: 20

LOGISTIC DATA:

Packaging method: 50

Number of units in the secondary packaging: 1

Number of units in the packaging: 50

Net unit weight [g]: 74

Grammage [g]: 110

Length of a unit pack [cm]: 10

Width of a unit pack [cm]: 4

Height of a unit pack [cm]: 10

Weight of a cardboard box [kg]: 5.5

Width of a cardboard box [cm]: 22

Height of a cardboard box [cm]: 22.5

Length of a cardboard box [cm]: 52

Date of issue: 15.11.2022, 06:21

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

02553 NAVI CTX-DT10-C/M

Ceiling-mounted spotlight fitting

Volume of a cardboard box [m³]: 0.02574